



# SMART Transmitter Power Supply/SMART Current Driver

## KCD2-SCS-Ex2


- 2-channel isolated barrier
- 24 V DC supply (Power Rail)
- Analog input (AI), Analog output (AO)
- Operates as transmitter power supply or current driver
- Housing width 12.5 mm
- Up to SIL 2 (SC 3) acc. to IEC/EN 61508



### Function

This isolated barrier is used for intrinsic safety applications. Each device channel works as a transmitter power supply or a current driver. The device transfers data by using a current signal. The device supports a bi-directional communication for SMART devices that use current modulation to transmit data and voltage modulation to receive data. For current driver operation, an open field circuit presents a high impedance to the control side to allow lead breakage to be monitored by control systems.

### Connection

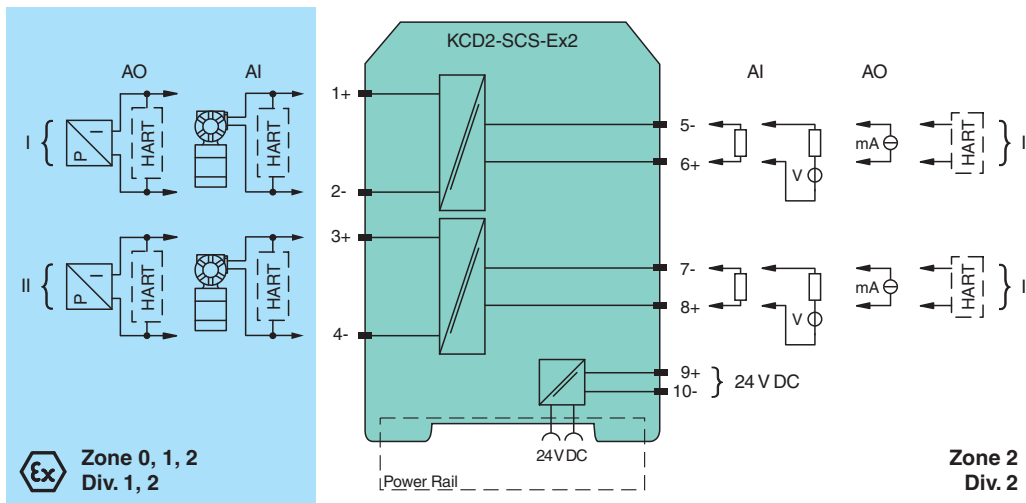

### Technical Data

General specifications	
Signal type	Analog input/analog output
Functional safety related parameters	
Safety Integrity Level (SIL)	SIL 2
Systematic capability (SC)	SC 3
Supply	
Connection	Power Rail or terminals 9+, 10-
Rated voltage	$U_r$ 19 ... 30 V DC
Ripple	max. 10 %
Rated current	$I_r$ max. 88 mA at 24 V

Release date: 2024-06-28 Date of issue: 2024-06-28 Filename: 70166762\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com



## Technical Data

Power dissipation	max. 1.4 W
Power consumption	max. 2.1 W
<b>Analog input</b>	
Number of channels	2
Suitable field devices	2-wire SMART transmitters
Signal	0/4 ... 20 mA , limited to approx. 30 mA
<b>Field circuit</b>	terminals 1+, 2-, 3+, 4-
Available voltage	min. 15 V at 20 mA min. 18 V at 4 mA
<b>Control circuit</b>	terminals 5-, 6+; 7-, 8+ limited electrical values : max. 30 V , max. 2 A
Input voltage	Voltage across terminals 10 ... 30 V. If the current is supplied from a source > 24 V, series resistance of $\geq (V - 24)/0.02 \Omega$ is needed, where V is the source voltage. The maximum value of the resistance is $(V - 10)/0.02 \Omega$ . (sink output)
Load	max. 350 $\Omega$ (source output)
Ripple	20 mV <sub>eff</sub>
<b>Analog output</b>	
Number of channels	2
Suitable field devices	SMART I/P converters (positioner), on-site-displays
Signal	0/4 ... 20 mA , limited to approx. 30 mA
<b>Field circuit</b>	terminals 1+, 2-, 3+, 4-
Load	max. 650 $\Omega$
Voltage	min. 13 V at 20 mA
Ripple	20 mV <sub>eff</sub> , on all signal terminals
<b>Control circuit</b>	terminals 5-, 6+; 7-, 8+ limited electrical values : max. 30 V , max. 2 A
Voltage drop	max. 6 V
Line fault detection	> 100 k $\Omega$ at max. 30 V, with field wiring open
<b>Transfer characteristics</b>	
Deviation	max. 20 $\mu$ A incl. calibration, linearity, hysteresis, loads and fluctuations of supply voltage
Influence of ambient temperature	< 2 $\mu$ A/K (-40 ... 70 °C (-40 ... 158 °F))
Frequency range	field side into the control side: bandwidth with 0.5 V <sub>pp</sub> signal 0 ... 3 kHz (-3 dB) control side into the field side: bandwidth with 0.5 V <sub>pp</sub> signal 0 ... 3 kHz (-3 dB)
Settling time	max. 200 ms
Rise time/fall time	max. 100 ms (10 ... 90 %)
<b>Galvanic isolation</b>	
Field circuit/control circuit	basic insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
Control circuit/control circuit	functional isolation, rated voltage: 50 V
Field circuit/power supply	reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
Control/power supply	basic insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
<b>Indicators/settings</b>	
Display elements	LED
Factory setting	analog input with source output
Configuration	via DIP switches
Labeling	space for labeling at the front
<b>Directive conformity</b>	
Electromagnetic compatibility	
Directive 2014/30/EU	EN 61326-1:2013 (industrial locations)
<b>Conformity</b>	
Electromagnetic compatibility	NE 21:2017 EN 61326-3-2:2018
Degree of protection	IEC 60529:2001
Protection against electrical shock	UL 61010-1:2019
<b>Ambient conditions</b>	
Ambient temperature	-40 ... 70 °C (-40 ... 158 °F)

Release date: 2024-06-28 Date of issue: 2024-06-28 Filename: 70166762\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

 Pepperl+Fuchs Group  
www.pepperl-fuchs.com

 USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

 Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

 Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

 PEPPERL+FUCHS

## Technical Data

Mechanical specifications	
Degree of protection	IP20
Connection	screw terminals
Mass	approx. 115 g
Dimensions	12.5 x 124 x 114 mm (0.5 x 4.9 x 4.5 inch) (W x H x D) , housing type A2
Height	124 mm
Width	12.5 mm
Depth	114 mm
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001
Data for application in connection with hazardous areas	
EU-type examination certificate	UL 22 ATEX 2786 X
Marking	Ⓜ II (1)G [Ex ia Ga] IIC Ⓜ II (1)D [Ex ia Da] IIIC Ⓜ I (M1) [Ex ia Ma] I
Output	Ex ia, Ex iaD
Voltage	$U_o$ 25.2 V
Current	$I_o$ 100 mA
Power	$P_o$ 630 mW
Internal capacitance	$C_i$ 1.05 nF
Internal inductance	$L_i$ 0
Supply	
Maximum safe voltage	$U_m$ 250 V <sub>rms</sub> (Attention! The rated voltage can be lower.)
Input	
Maximum safe voltage	$U_m$ 250 V <sub>rms</sub> (Attention! The rated voltage can be lower.)
Certificate	UL 22 ATEX 2787 X
Marking	Ⓜ II 3G Ex ec IIC T4 Gc [device in zone 2]
Galvanic isolation	
Field circuit/control circuit	safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Field circuit/power supply	safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Directive conformity	
Directive 2014/34/EU	EN IEC 60079-0:2018 , EN 60079-11:2012 , EN IEC 60079-7:2015+A1:2018
International approvals	
UL approval	E106378
Control drawing	116-0490 (cULus)
IECEx approval	
IECEx certificate	IECEx ULD 22.0020X
IECEx marking	[Ex ia Ga] IIC , [Ex ia Da] IIIC , [Ex ia Ma] I Ex ec IIC T4 Gc
General information	
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .

Release date: 2024-06-28 Date of issue: 2024-06-28 Filename: 70166762\_eng.pdf


Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
[www.pepperl-fuchs.com](http://www.pepperl-fuchs.com)USA: +1 330 486 0002  
[pa-info@us.pepperl-fuchs.com](mailto:pa-info@us.pepperl-fuchs.com)Germany: +49 621 776 2222  
[pa-info@de.pepperl-fuchs.com](mailto:pa-info@de.pepperl-fuchs.com)Singapore: +65 6779 9091  
[pa-info@sg.pepperl-fuchs.com](mailto:pa-info@sg.pepperl-fuchs.com)

**PEPPERL+FUCHS**

Assembly

Front view

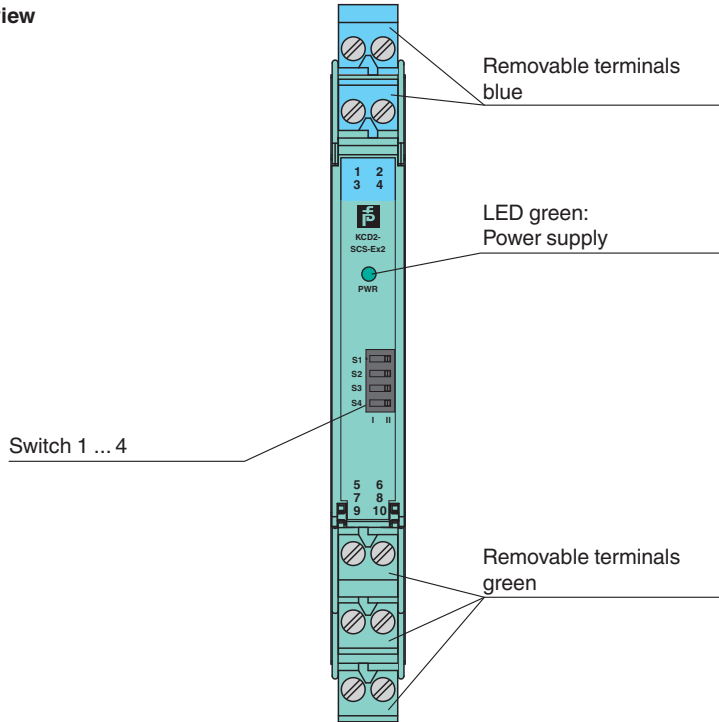

Release date: 2024-06-28 Date of issue: 2024-06-28 Filename: 70166762\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com


USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

**PF** PEPPERL+FUCHS

**Configuration**

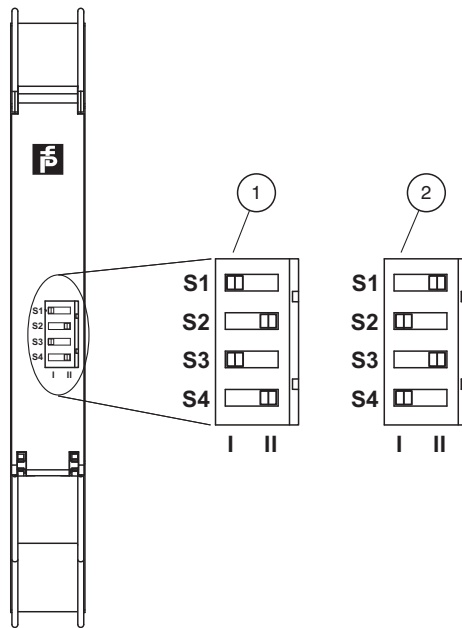

- 1 Analog input with current source output
- 2 Analog input with current sink output, analog output

**Switch position**

Function		Switch			
		Channel 1		Channel 2	
Field side	Control side	S1	S2	S3	S4
Analog input	Current source	I	II	I	II
Analog input	Current sink	II	I	II	I
Analog output		II	I	II	I

Factory setting: analog input with current source output

Release date: 2024-06-28 Date of issue: 2024-06-28 Filename: 70166762\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".