

**Overview**

- light barrier
- 60 ... 600 mm
- pulsed PinPoint LED
- push-pull
- Teach-in and IO-Link
- connector M12 4 pin
- -25 ... 60 °C
- IP 68/69K & proTect+



Picture similar



**Technical data**

**General data**

Type	Light barrier
Special type	Washdown design
Version	Standard object detection
Light source	Pulsed PinPoint LED
Background position Sde	60 ... 600 mm
Scanning range Sa	90% ... 85% Sde
Power on indication	LED green
Light indicator	LED yellow
Sensing distance adjustment	Teach-in and IO-Link
Wave length	630 nm
Suppression of reciprocal influence	Yes
Alignment optical axis	< 1°
Approvals/certificates	Ecolab

**Electrical data**

Response time / release time	< 0,49 ms
Voltage supply range +Vs	10 ... 30 VDC
Current consumption max. (no load)	40 mA

**Electrical data**

Current consumption typ.	30 mA
Voltage drop Vd	< 3 VDC
Output function	Light / dark operate
Output circuit	Push-pull
Output current	< 100 mA
Short circuit protection	Yes
Reverse polarity protection	Yes

**Mechanical data**

Width / diameter	20,2 mm
Height / length	47,2 mm
Depth	37,7 mm
Type	Rectangular
Housing material	Stainless steel 1.4404 (V4A)
Front (optics)	PMMA
Connection types	Connector M12 4 pin


**Ambient conditions**

Protection class	IP 68/69K & proTect+
Operating temperature	-25 ... +60 °C


**Remarks**

- qTeach
- IO-Link: V1.1, filter functions, qTeach lock adjustable


**Dimension drawing**

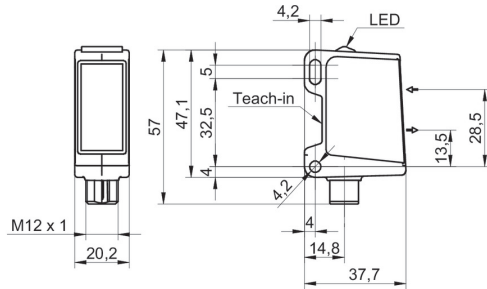

**Connection diagram**

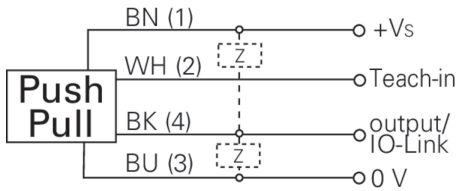

**Pin assignment**



**Beam characteristic (typically)**

