

MDFM 2019424/C270

Magnetic singleturn encoder

Article number: 10166038

Overview

- Immune to dust and dirt
- Free of wear and tear
- Current output up to 270°
- Cable 2 m, open cable end
- Operating temperature -40 ... 85 °C
- Protection IP 67
- Magnetic rotor not included in delivery



Picture similar

Technical data


Technical data - electrical ratings

Voltage supply	15...30 VDC
Reverse polarity protection	Yes, +Vs to GND
Short-circuit proof	Yes
Consumption typ.	≤ 30 mA (w/o load)
Interface	Analog 4...20 mA
Function	Singleturn
Measuring range	270° (linear)
Resolution	0.09 °
System accuracy	±0.25 %
Temperature drift	±0.1 % (Full Scale)
Sensing method	Magnetic
Response time	< 4 ms
Approval	CE UL


Technical data - mechanical design

Size	20 mm
Dimensions	20 x 8 x 30 mm
Protection EN 60529	IP 67
Working distance	≤ 5 mm (axial, MxFS AA03X08) ≤ 2 mm (axial, MxFN AA01x06) ≤ 0.4 mm (radial)
Material	Housing: brass nickel-plated Sensing surface: PBTP
Operating temperature	-40...+85 °C
Weight approx.	50 g
Connection	Cable 2 m, 3 x 0.14, PUR


Output signals

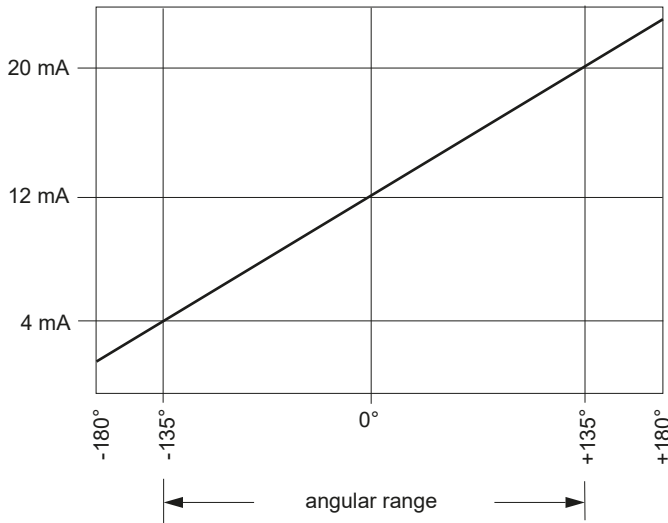


Connection diagram

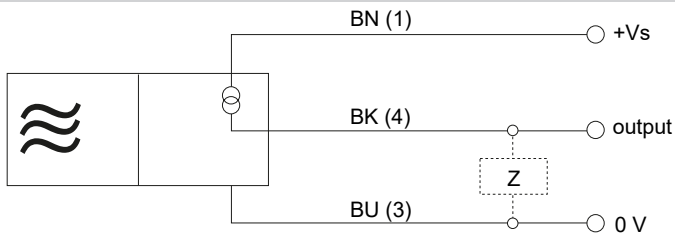

Rotational or linear direction

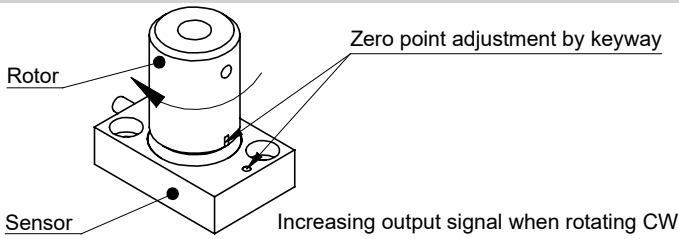

Working distance

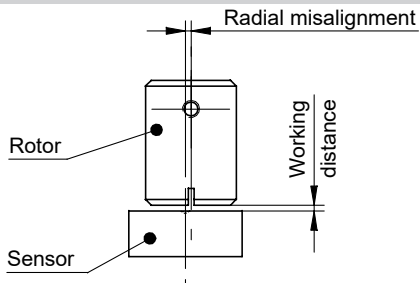

MDFM 20I9424/C270

Magnetic singleturn encoder

Article number: 10166038

Dimensions

