

EIL580-SY

Solid shaft with synchro flange

100...5000 pulses per revolution

Overview

- Size $\varnothing 58$ mm
- Precise optical sensing
- Output signal level TTL or HTL
- Synchro flange
- Connection axial, radial or tangential
- Pulses per revolution up to 5000
- High protection up to IP 67
- High resistance to shock and vibrations



Technical data

Technical data - electrical ratings

Voltage supply	5 VDC $\pm 5\%$ 8...30 VDC 4.75...30 VDC
Reverse polarity protection	Yes
Short-circuit proof	Yes (HTL) Yes (TTL, max. 1 s and 1 signal)
Consumption w/o load	≤ 70 mA
Pulses per revolution	100 ... 5000
Phase shift	$90^\circ \pm 10^\circ$
Duty cycle	40...60 %
Reference signal	Zero pulse, width $90^\circ \pm 10\%$
Sensing method	Optical
Output frequency	≤ 300 kHz (TTL) ≤ 160 kHz (HTL)
Output signals	A+, B+, R+, A-, B-, R-
Output stages	TTL/RS422 HTL/push-pull
Interference immunity	EN 61000-6-2
Emitted interference	EN 61000-6-3
Approval	UL 508 / CSA 22.2

Technical data - mechanical design

Size (flange)	$\varnothing 58$ mm
---------------	---------------------

Technical data - mechanical design

Shaft type	$\varnothing 6 \times 10$ mm, solid shaft with flat
Admitted shaft load	≤ 40 N axial ≤ 80 N radial
Flange	Synchro flange
Protection EN 60529	IP 65 (without shaft seal) IP 67 (with shaft seal)
Operating speed	≤ 6000 rpm (+20 °C, IP 67) ≤ 12000 rpm (+20 °C, IP 65)
Starting torque	≤ 0.015 Nm (+20 °C, IP 65) ≤ 0.02 Nm (+20 °C, IP 67)
Material	Housing: aluminium die-cast Flange: aluminium Solid shaft: stainless steel
Operating temperature	-40...+85 °C
Relative humidity	90 % non-condensing
Resistance	EN 60068-2-6 Vibration 30 g, 10-2000 Hz EN 60068-2-27 Shock 300 g, 6 ms
Connection	Flange connector M12, 8-pin Flange connector M23, 12-pin Cable
Weight approx.	300 g

EIL580-SY

Solid shaft with synchro flange

100...5000 pulses per revolution


Terminal assignment

Flange connector M23, 12-pin / cable

Pin	Core color	Assignment
1	pink	B-
2	–	–
3	blue	R+
4	red	R-
5	green	A+
6	yellow	A-
7	–	–
8	grey	B+
9	–	–
10	white	GND
11	–	–
12	brown	UB

Screen: Connected to housing

Cable data: PVC, [4x2x0.14 mm²], bending radius >32.5 mm, outer diameter approx. 6.4 mm



Flange connector M23, pin contacts, 12-pin, counterclockwise (CCW)


Flange connector M12, 8-pin

Pin	Assignment
1	GND
2	UB
3	A+
4	A-
5	B+
6	B-
7	R+
8	R-



Output signals

Clockwise rotating direction when looking at flange.

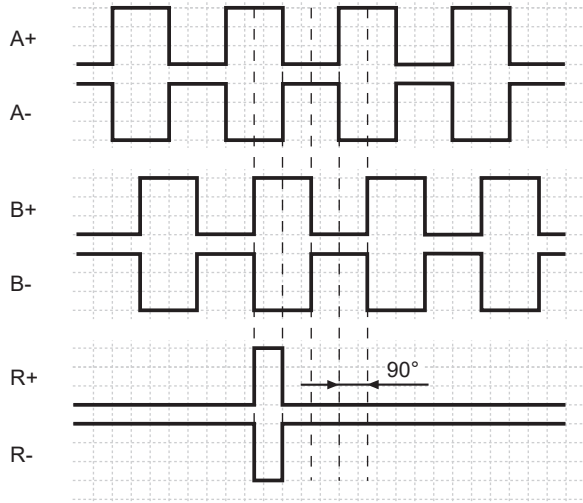

Trigger level

Outputs	TTL/RS422
Output level High	≥2.5 V
Output level Low	≤0.5 V
Load	≤20 mA


Outputs	HTL/Push-pull
Output level High	≥UB -3 V
Output level Low	≤1.5 V
Load	≤20 mA

EIL580-SY


Solid shaft with synchro flange

100...5000 pulses per revolution


Dimensions

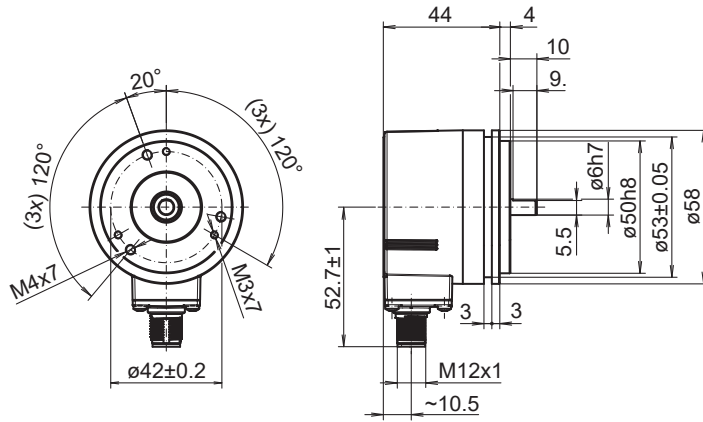

Synchro flange, flange connector M12, radial

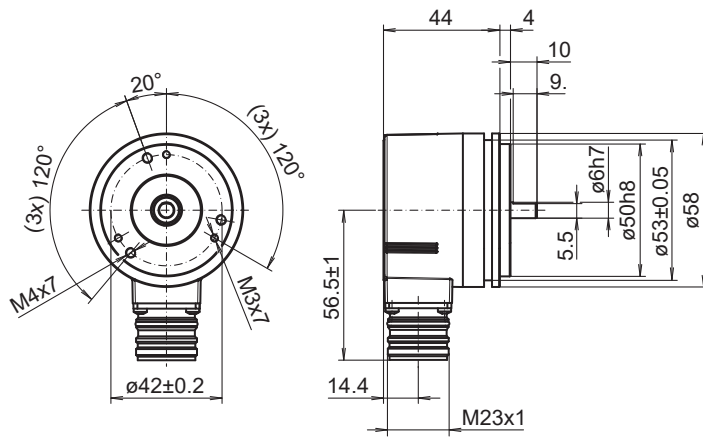

Synchro flange, flange connector M23, radial

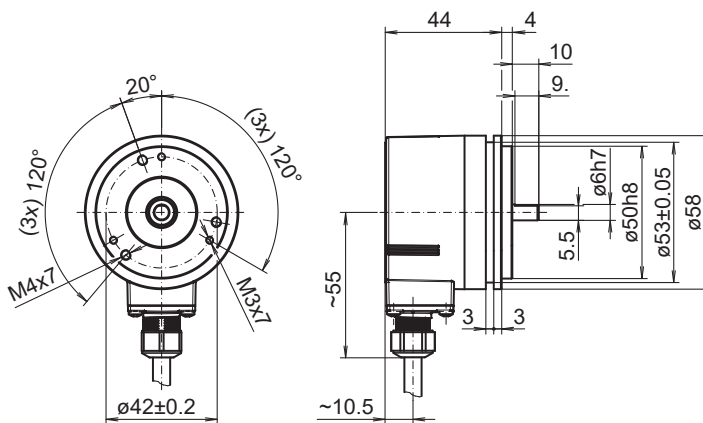


Synchro flange, cable, radial

EIL580-SY


Solid shaft with synchro flange

100...5000 pulses per revolution


Dimensions

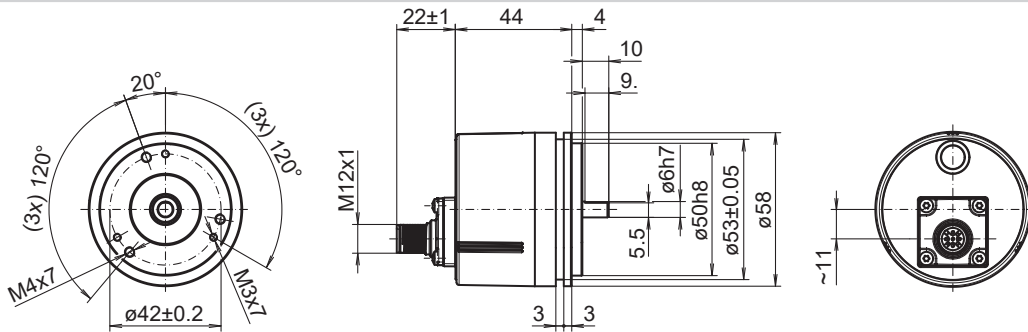


Synchro flange, flange connector M12, axial

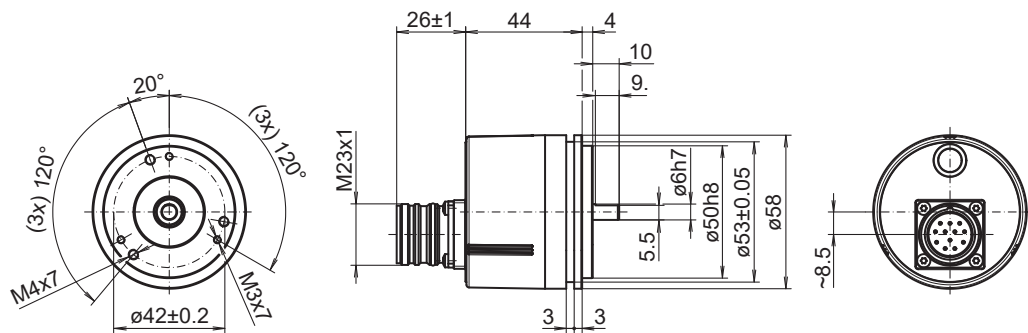

Synchro flange, flange connector M23, axial

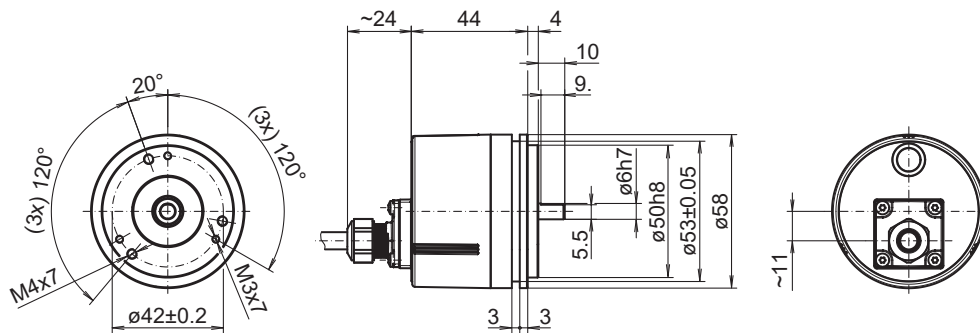

Synchro flange, cable, axial

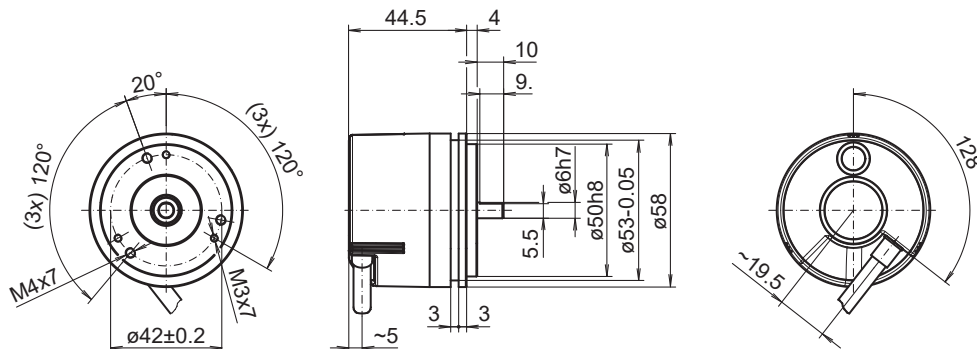

Synchro flange, cable, tangential

EIL580-SY

Solid shaft with synchro flange

100...5000 pulses per revolution

Ordering reference

		EIL580	-	S	Y	##	.	#	##	#	.	####	.	A
Product		EIL580												
Shaft type	Solid shaft			S										
Flange (shaft)	Synchro flange, centering collar ø50 x 4 mm, flute ø53 mm, pitch circle diameter ø42 - 3xM3/3xM4				Y									
Shaft	ø6 x 10 mm, with flat									06				
	ø3/8 x 4/5 (Ø9.525 x 20.32 mm), with flat									U3				
Protection class	IP 65											5		
	IP 67											7		
Connection	Cable radial, 1 m													R
	Cable radial, 2 m													L
	Flange socket radial, M23, 12-pin, male contacts, CCW													F
	Flange socket radial, M12, 8-pin, male contacts, CCW													B
	Cable axial, 1 m													T
	Cable axial, 2 m													U
	Flange socket axial, M23, 12-pin, male contacts, CCW													D
	Flange socket axial, M12, 8-pin, male contacts, CCW													A
	Cable tangential, 1 m													P
	Cable tangential, 2 m													Q
Voltage supply / output	5 VDC, TTL/RS422, 6 channel													E
	8...30 VDC, TTL/RS422, 6 channel (Vout=5V)													H
	8...30 VDC, HTL/push pull, 6 channel													N
	4,75...30 VDC, HTL/push pull, 6 channel (Vout=Vin)													Q

EIL580-SY

Solid shaft with synchro flange

100...5000 pulses per revolution

Ordering reference

	EIL580	-	S	Y	##	.	#	##	#	.	####	.	A
Pulse number													
100													100
120													120
150													150
200													200
250													250
256													256
300													300
360													360
400													400
500													500
512													512
600													600
720													720
800													800
900													900
1000													1000
1024													1024
1200													1200
1250													1250
1440													1440
1500													1500
1800													1800
2000													2000
2048													2048
2500													2500
3000													3000
3600													3600
4000													4000
4096													4096
5000													5000

Operating temperature

-40...+85 °C

2024-04-08 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.

EIL580-SY

Solid shaft with synchro flange

100...5000 pulses per revolution

Accessories

Mounting accessories

11065916	Coupling CPS25 (L=19, D1=06 / D2=06)
11065917	Coupling CPS25 (L=19, D1=06 / D2=08)
11065922	Coupling CPS25 (L=19, D1=10 / D2=06)
11065926	Coupling CPS25 (L=19, D1=11 / D2=06)
11065928	Coupling CPS25 (L=19, D1=12 / D2=06)
10141131	Spring washer coupling (D1=6 / D2=6)
10141132	Spring washer coupling (D1=6 / D2=10)
11034139	Spring washer coupling (D1=6 / D2=16)
11050507	Bellows coupling (D1=06 / D2=10)
10117667	Mounting adaptor
10117668	Set of eccentric fixings for mounting clamp (10117667)
11065545	Set of eccentric fixings type A
10158124	Bearing flange for encoders with synchro flange (Z 119.035)