

SMART Current Driver

KCD2-SCD-Ex1.ES

- 1-channel isolated barrier
- 24 V DC supply (Power Rail)
- Current output up to 650 Ω load
- HART-IP and valve positioner
- Line fault detection (LFD)
- Housing width 12.5 mm
- Up to SIL 3 acc. to IEC/EN 61508



Function

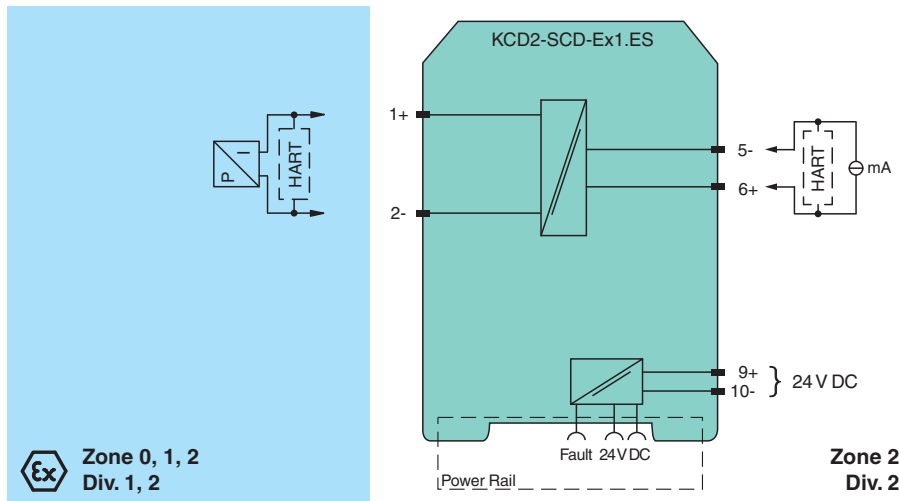
This isolated barrier is used for intrinsic safety applications. The device repeats the input signal from a control system to drive HART I/P converters, electrical valves, and positioners located in a hazardous area.

Digital signals are superimposed on the analog values at the field side or control side and are transferred bi-directionally. The current is transferred via a DC/DC converter and repeated at the output terminals.

An open or short field circuit presents a high impedance to the control side to allow alarm conditions to be monitored by the control system. Test sockets for the connection of HART communicators are integrated into the terminals of the device.

A fault is signaled by LEDs and a separate collective error message output.

Connection



Technical Data

General specifications			
Signal type	Analog output		
Functional safety related parameters			
Safety Integrity Level (SIL)	SIL 3		
Supply			
Connection	Power Rail or terminals 9+, 10-		
Rated voltage	U_r	19 ... 30 V DC	
Ripple	≤ 10 %		
Rated current	I_r	≤ 33 mA at 24 V	
Power dissipation	≤ 700 mW at 20 mA and 500 Ω load		

Release date: 2023-08-10 Date of issue: 2023-08-10 Filename: 70101788_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Power consumption		≤ 800 mW
Input		
Connection side		control side
Connection		terminals 5-, 6+
Input signal		4 ... 20 mA , limited to approx. 25 mA
Input voltage		open loop voltage of the control system < 30 V
Voltage drop		approx. 6 V at 20 mA
Input resistance		> 100 kΩ, with field wiring open or < 50 Ω
Output		
Connection side		field side
Connection		terminals 1+, 2-
Voltage		≥ 13 V at 20 mA
Current		4 ... 20 mA
Load		100 ... 650 Ω
Ripple		20 mV _{rms}
Line fault detection		field wiring open or < 50 Ω and test current < 2 mA
Transfer characteristics		
Deviation		at 20 °C (68 °F), 4 ... 20 mA < 0.1 % of full scale, incl. non-linearity and hysteresis
Influence of ambient temperature		< 2 μA/K (-20 ... 70 °C (-4 ... 158 °F)); < 4 μA/K (-40 ... -20 °C (-40 ... -4 °F))
Frequency range		field side into the control side: bandwidth with 0.5 V _{pp} signal 0 ... 3 kHz (-3 dB) control side into the field side: bandwidth with 1 mA _{pp} signal 0 ... 3 kHz (-3 dB)
Rise time		10 to 90 % ≤ 10 ms
Galvanic isolation		
Input/Output		basic insulation according to IEC/EN 61010-1, rated insulation voltage 300 V _{eff}
Input/power supply		basic insulation according to IEC/EN 61010-1, rated insulation voltage 300 V _{eff}
Output/power supply		reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V _{eff}
Indicators/settings		
Display elements		LEDs
Labeling		space for labeling at the front
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
Conformity		
Electromagnetic compatibility		NE 21:2017 EN 61326-3-2:2018
Degree of protection		IEC 60529
Protection against electrical shock		UL 61010-1:2012
Ambient conditions		
Ambient temperature		-40 ... 70 °C (-40 ... 158 °F)
Mechanical specifications		
Degree of protection		IP20
Connection		screw terminals
Mass		approx. 100 g
Dimensions		12.5 x 124 x 114 mm (0.5 x 4.9 x 4.5 inch) (W x H x D) , housing type A2
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
Data for application in connection with hazardous areas		
EU-type examination certificate		CESI 20 ATEX 016 X
Marking		⊕ II (1)G [Ex ia Ga] IIC ⊕ II (1)D [Ex ia Da] IIIC ⊕ I (M1) [Ex ia Ma] I
Output		Ex ia
Supply		
Maximum safe voltage	U _m	250 V AC (Attention! U _m is no rated voltage.)
Equipment		terminals 1+, 2-

Release date: 2023-08-10 Date of issue: 2023-08-10 Filename: 70101788_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.comUSA: +1 330 486 0002
pa-info@us.pepperl-fuchs.comGermany: +49 621 776 2222
pa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com


PEPPERL+FUCHS

Technical Data

Voltage	U _o	25.2 V
Current	I _o	100 mA
Power	P _o	630 mW
Internal capacitance	C _i	5.7 nF
Internal inductance	L _i	negligible
Certificate	CESI 20 ATEX 017 X	
Marking	Ⓢ II 3G Ex ec IIC T4 Gc	
Galvanic isolation		
Input/Output	safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V	
Output/power supply	safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V	
Directive conformity		
Directive 2014/34/EU	EN IEC 60079-0:2018 , EN 60079-11:2012 , EN 60079-7:2015	
International approvals		
UL approval	E106378	
Control drawing	116-0471 (cULus)	
IECEx approval		
IECEx certificate	IECEx CES 20.0009X	
IECEx marking	[Ex ia Ga] IIC , [Ex ia Da] IIIC , [Ex ia Ma] I Ex ec IIC T4 Gc	
General information		
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .	

Assembly

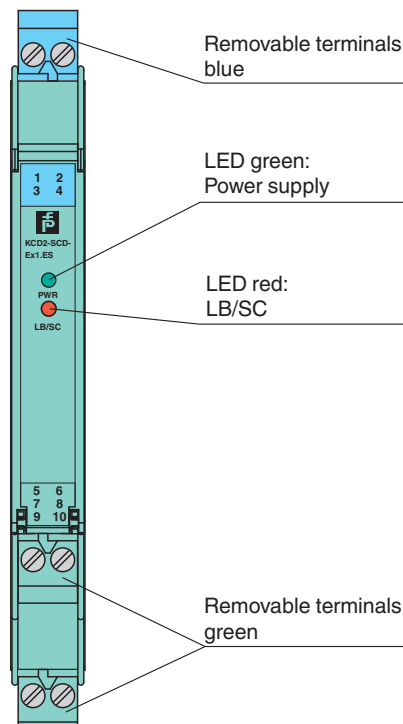Front view



Matching System Components

	KFD2-EB2	Power Feed Module
---	-----------------	-------------------

Release date: 2023-08-10 Date of issue: 2023-08-10 Filename: 70101788_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".






Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com




Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

Matching System Components

	UPR-03	Universal Power Rail with end caps and cover, 3 conductors, length: 2 m
	UPR-03-M	Universal Power Rail with end caps and cover, 3 conductors, length: 1,6 m
	UPR-03-S	Universal Power Rail with end caps and cover, 3 conductors, length: 0.8 m
	K-DUCT-BU	Profile rail, wiring comb field side, blue
	K-DUCT-BU-UPR-03	Profile rail with UPR-03- * insert, 3 conductors, wiring comb field side, blue

Accessories

	KC-ST-5GN	Terminal block for KC modules, 2-pin screw terminal, green
	KC-STP-5BU	Terminal block for KC modules, 2-pin screw terminal, with test sockets, blue
	KF-CP	Red coding pins, packaging unit: 20 x 6