

Product data sheet

Specifications



Contactor, TeSys K, 3P, AC-3, It or eq to 440V, 6A, 1 NO aux, 24VDC coil

LP4K0610BW3

Product availability: Stock - Normally stocked in distribution facility

Price*: 92.00 USD

Main

Range	TeSys
Product or Component Type	Contactor
Device short name	LP4K
contactor application	Motor control

Complementary

Utilisation category	AC-3 AC-3e AC-4
poles description	3P
power pole contact composition	3 NO
[Ue] rated operational voltage	Power circuit <= 690 V AC <= 400 Hz Signalling circuit <= 690 V AC <= 400 Hz
[Ie] rated operational current	6 A (at <140 °F (60 °C)) at <= 440 V AC AC-3 for power circuit 6 A (at <140 °F (60 °C)) at <= 440 V AC AC-3e for power circuit
Control circuit type	DC wide range
[Uc] control circuit voltage	24 V DC
Motor power kW	1.5 kW 220...230 V AC 50/60 Hz AC-3 2.2 kW 380...415 V AC 50/60 Hz AC-3 3 kW 440/690 V AC 50/60 Hz AC-3 1.5 kW 220...230 V AC 50/60 Hz AC-3e 2.2 kW 380...415 V AC 50/60 Hz AC-3e 3 kW 440/690 V AC 50/60 Hz AC-3e 1.5 kW 220...230 V AC 50/60 Hz AC-4 2.2 kW 380...415 V AC 50/60 Hz AC-4 3 kW 440/690 V AC 50/60 Hz AC-4
Auxiliary contact composition	1 NO
[Uimp] rated impulse withstand voltage	8 kV
Overvoltage category	III
[Ith] conventional free air thermal current	20 A (at 140 °F (60 °C)) for power circuit 10 A (at 122 °F (50 °C)) for signalling circuit
Irms rated making capacity	110 A AC for power circuit conforming to IEC 60947 110 A AC for signalling circuit conforming to IEC 60947
Rated breaking capacity	110 A at 220...230 V conforming to IEC 60947 110 A at 380...400 V conforming to IEC 60947 110 A at 415 V conforming to IEC 60947 110 A at 440 V conforming to IEC 60947 80 A at 500 V conforming to IEC 60947 70 A at 660...690 V conforming to IEC 60947

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

[Icw] rated short-time withstand current	90 A 122 °F (50 °C) - 1 s for power circuit 85 A 122 °F (50 °C) - 5 s for power circuit 80 A 122 °F (50 °C) - 10 s for power circuit 60 A 122 °F (50 °C) - 30 s for power circuit 45 A 122 °F (50 °C) - 1 min for power circuit 40 A 122 °F (50 °C) - 3 min for power circuit 20 A 122 °F (50 °C) - >= 15 min for power circuit 80 A - 1 s for signalling circuit 90 A - 500 ms for signalling circuit 110 A - 100 ms for signalling circuit
Associated fuse rating	25 A gG at <= 440 V for power circuit 25 A aM for power circuit 10 A gG for signalling circuit conforming to IEC 60947 10 A gG for signalling circuit conforming to VDE 0660
Average impedance	3 mOhm - lth 20 A 50 Hz for power circuit
[Ui] rated insulation voltage	Power circuit 600 V UL 508 Power circuit 690 V IEC 60947-4-1 Signalling circuit 690 V IEC 60947-4-1 Signalling circuit 690 V IEC 60947-5-1 Signalling circuit 600 V UL 508 Power circuit 600 V CSA C22.2 No 14 Signalling circuit 600 V CSA C22.2 No 14
Insulation resistance	> 10 MOhm for signalling circuit
Inrush power in W	1.8 W 68 °F (20 °C))
Hold-in power consumption in W	1.8 W 68 °F (20 °C)
Heat dissipation	1.8 W
Control circuit voltage limits	Operational: 0.7...1.3 U _c (at <122 °F (50 °C)) Drop-out: >= 0.10 U _c (at <122 °F (50 °C))
Connections - terminals	screw clamp terminals 1 0.002...0.006 in ² (1.5...4 mm ²)solid screw clamp terminals 1 0.001...0.006 in ² (0.75...4 mm ²)flexible without cable end screw clamp terminals 1 0.0005...0.004 in ² (0.34...2.5 mm ²)flexible with cable end screw clamp terminals 2 0.002...0.006 in ² (1.5...4 mm ²)solid screw clamp terminals 2 0.001...0.006 in ² (0.75...4 mm ²)flexible without cable end screw clamp terminals 2 0.0005...0.002 in ² (0.34...1.5 mm ²)flexible with cable end Power circuit screw clamp terminals 2 0.002 in ² (1.5 mm ²)flexible with cable end
Maximum operating rate	3600 cyc/h
Coil technology	Built-in bidirectional peak limiting diode suppressor
Auxiliary contacts type	Instantaneous 1 NO
Minimum switching current	5 mA for signalling circuit
Minimum switching voltage	17 V for signalling circuit
Mounting Support	Plate Rail
Tightening torque	7.08...11.5 lbf.in (0.8...1.3 N.m) screw clamp terminals Philips No 2 7.08...11.5 lbf.in (0.8...1.3 N.m) screw clamp terminals flat Ø 6 mm 7.08...11.5 lbf.in (0.8...1.3 N.m) screw clamp terminals pozidriv No 2
Operating time	10...20 ms coil de-energisation and NO opening 30...40 ms coil energisation and NO closing
Safety reliability level	B10d = 1369863 cycles contactor with nominal load EN/ISO 13849-1 B10d = 20000000 cycles contactor with mechanical load EN/ISO 13849-1
Mechanical durability	30 Mcycles
Electrical durability	1.3 Mcycles 6 A AC-3 <= 440 V 1.3 Mcycles 6 A AC-3e <= 440 V 0.05 Mcycles 36 A AC-4 <= 440 V
Height	2.3 in (58 mm)
Width	1.8 in (45 mm)
Depth	2.2 in (57 mm)

Net Weight	0.518 lb(US) (0.235 kg)
------------	-------------------------

Environment

Standards	EN/IEC 60947-4-1 EN/IEC 60947-5-1 UL 60947-4-1 UL 60947-5-1 CSA C22.2 No 60947-4-1 CSA C22.2 No 60947-5-1 GB/T 14048.4
-----------	--

Product Certifications	CB Scheme CCC UL CSA EAC CE UKCA
------------------------	--

IP degree of protection	IP2X
-------------------------	------

Ambient air temperature for operation	-13...122 °F (-25...50 °C)
---------------------------------------	----------------------------

Ambient Air Temperature for Storage	-58...176 °F (-50...80 °C)
-------------------------------------	----------------------------

Operating altitude	6561.68 ft (2000 m) without derating
--------------------	--------------------------------------

Flame retardance	V1 conforming to UL 94 Requirement 2 conforming to NF F 16-101 Requirement 2 conforming to NF F 16-102
------------------	--

Ordering and shipping details

Category	US10I1222321
----------	--------------

Discount Schedule	0112
-------------------	------

GTIN	3389110428568
------	---------------

Returnability	Yes
---------------	-----

Country of origin	ID
-------------------	----

Packing Units

Unit Type of Package 1	PCE
------------------------	-----

Number of Units in Package 1	1
------------------------------	---

Package 1 Height	1.969 in (5.000 cm)
------------------	---------------------

Package 1 Width	2.362 in (6.000 cm)
-----------------	---------------------

Package 1 Length	2.559 in (6.500 cm)
------------------	---------------------

Package 1 Weight	7.795 oz (221.000 g)
------------------	----------------------

Unit Type of Package 2	S02
------------------------	-----

Number of Units in Package 2	40
------------------------------	----

Package 2 Height	5.906 in (15.000 cm)
------------------	----------------------

Package 2 Width	11.811 in (30.000 cm)
-----------------	-----------------------

Package 2 Length	15.748 in (40.000 cm)
------------------	-----------------------

Package 2 Weight	20.243 lb(US) (9.182 kg)
------------------	--------------------------

Unit Type of Package 3	P06
------------------------	-----

Number of Units in Package 3	640
------------------------------	-----

Package 3 Height	29.528 in (75.000 cm)
------------------	-----------------------

Package 3 Width	23.622 in (60.000 cm)
Package 3 Length	31.496 in (80.000 cm)
Package 3 Weight	338.419 lb(US) (153.504 kg)

Contractual warranty

Warranty	18 months
-----------------	-----------

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

Well-being performance

✓ Reach Free Of Svhc

✓ Toxic Heavy Metal Free

✓ Mercury Free

✓ Rohs Exemption Information Yes

Certifications & Standards

Reach Regulation

[REACH Declaration](#)

Eu Rohs Directive

Compliant

[EU RoHS Declaration](#)

China Rohs Regulation

[China RoHS declaration](#)

Pro-active China RoHS declaration (out of China RoHS legal scope)

Environmental Disclosure

[Product Environmental Profile](#)

Weee

The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Circularity Profile

[End of Life Information](#)


California Proposition 65

WARNING: This product can expose you to chemicals including: Antimony oxide & Antimony trioxide, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov


Dimensions Drawings

Dimensions

Contactors LC1 K, LP1 K, LP4 K: Mounting on Panel

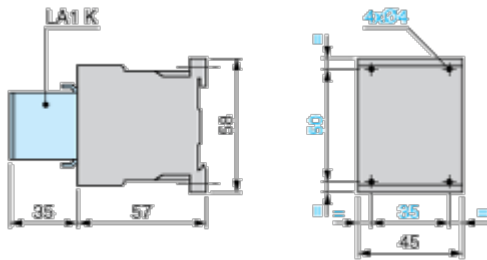


Contactors LC1 K, LP1 K, LP4 K: Mounting on Rail AM1 DP200 or AM1 DE200 (35 mm)

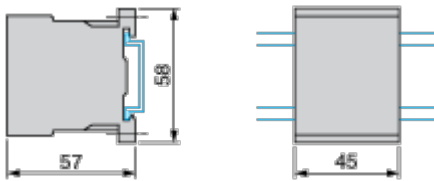

Connections and Schema

Wiring

3-Pole Reversing Contactors with Screw Clamp Connections: 3P + N/O

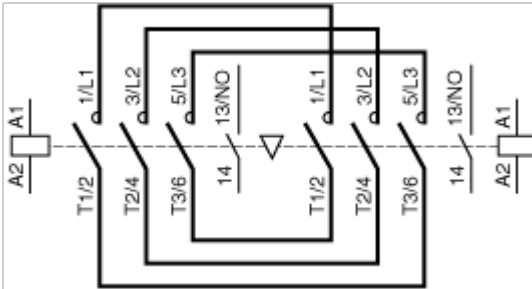

3-Pole Reversing Contactors with Screw Clamp Connections: 3P + N/C

