

# Product datasheet

Specifications



## processor module M340 - max 512 discrete + 128 analog I/O - Modbus

BMXP341000

### Main

Range of product	Modicon M340 automation platform
Product or component type	Processor module
Number of racks	2
Number of slots	11
Discrete I/O processor capacity	512 I/O single-rack configuration
Analogue I/O processor capacity	66 I/O single-rack configuration 128 I/O multi-rack configuration
Number of application specific channel	20
Monitoring	Diagnostic counters Modbus Event counters Modbus

### Complementary

Control channels	Programmable loops
Integrated connection type	Non isolated serial link RJ45 character mode, transmission mode: asynchronous in baseband, RS232C, transmission mode: 2 twisted shielded pairs at 0.3...19.2 kbit/s full duplex Non isolated serial link RJ45 character mode, transmission mode: asynchronous in baseband, RS485, transmission mode: 1 twisted shielded pair at 0.3...19.2 kbit/s half duplex Non isolated serial link RJ45, master/slave Modbus, RTU/ASCII, transmission mode: asynchronous in baseband, RS232C, transmission mode: 1 twisted shielded pair at 0.3...19.2 kbit/s half duplex Non isolated serial link RJ45, master/slave Modbus, RTU/ASCII, transmission mode: asynchronous in baseband, RS485, transmission mode: 1 twisted shielded pair at 0.3...19.2 kbit/s half duplex USB port at 12 Mbit/s
Communication module processor capacity	2 Ethernet communication module 2 AS-Interface module
Number of devices per segment	0...32 (character mode) 0...32 (Modbus)
Number of devices	2 point-to-point character mode 2 point-to-point Modbus
Bus length	0...10 m serial link non isolated character mode segment 0...10 m serial link non isolated Modbus segment 0...1000 m serial link isolated character mode segment 0...1000 m serial link isolated Modbus segment 0...15 m character mode point-to-point 0...15 m Modbus point-to-point
Maximum tap links length	<15 m serial link non isolated character mode segment <15 m serial link non isolated Modbus segment <40 m serial link isolated character mode segment <40 m serial link isolated Modbus segment
Number of addresses	0...248 for character mode 0...248 for Modbus

<b>Requests</b>	1 K data bytes per request character mode 252 data bytes per RTU request Modbus 504 data bytes per ASCII request Modbus
<b>Control parameter</b>	One CRC on each frame (RTU) Modbus One LRC on each frame (ASCII) character mode One LRC on each frame (ASCII) Modbus
<b>Memory description</b>	Internal RAM 2048 kB Internal RAM 128 kB data Internal RAM 1792 kB program constants and symbols Supplied memory card (BMXRMS008MP) backup of programs, constants, symbols and data
<b>Maximum size of object areas</b>	128 kB unlocated internal data 16250 %Mi located internal bits 32464 %MWi internal words located internal data 32760 %KWi constant words located internal data
<b>Default size of object areas</b>	128 %KWi constant words located internal data 256 %Mi located internal bits 512 %MWi internal words located internal data
<b>Application structure</b>	1 periodic fast task 32 event tasks 1 cyclic/periodic master task No auxiliary task
<b>Execution time per instruction</b>	0.18 µs Boolean 0.26 µs double-length words 0.38 µs single-length words 1.74 µs floating points
<b>Number of instructions per ms</b>	4.2 Kinst/ms 65 % Boolean + 35 % fixed arithmetic 5.4 Kinst/ms 100 % Boolean
<b>System overhead</b>	0.2 ms for fast task 1.05 ms for master task
<b>Current consumption</b>	72 mA at 24 V DC
<b>Supply</b>	Internal power supply via rack
<b>marking</b>	CE
<b>Status LED</b>	1 LED (green) processor running (RUN) 1 LED (red) I/O module fault (I/O) 1 LED (red) memory card fault (CARD ERR) 1 LED (red) processor or system fault (ERR) 1 LED (yellow) activity on Modbus (SER COM)
<b>Net weight</b>	0.2 kg

## Environment

<b>Ambient air temperature for operation</b>	0...60 °C
<b>Relative humidity</b>	10...95 % without condensation
<b>IP degree of protection</b>	IP20
<b>protective treatment</b>	TC
<b>Directives</b>	2014/35/EU - low voltage directive 2014/30/EU - electromagnetic compatibility
<b>Product certifications</b>	CE UL CSA RCM EAC Merchant Navy

<b>Standards</b>	EN 61131-2 EN/IEC 61010-2-201 UL 61010-2-201 CSA C22.2 No 61010-2-201 IACS E10 EN/IEC 61000-6-5, interface type 1 and type 2 EN/IEC 61850-3, location G
------------------	---

<b>Environmental characteristic</b>	Hazardous location class I division 2
-------------------------------------	---------------------------------------

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	5.500 cm
<b>Package 1 Width</b>	11.000 cm
<b>Package 1 Length</b>	12.000 cm
<b>Package 1 Weight</b>	237.000 g
<b>Unit Type of Package 2</b>	S02
<b>Number of Units in Package 2</b>	15
<b>Package 2 Height</b>	15.000 cm
<b>Package 2 Width</b>	30.000 cm
<b>Package 2 Length</b>	40.000 cm
<b>Package 2 Weight</b>	3.900 kg

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------

## Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency

## Well-being performance

 Mercury Free

---

**Reach Regulation**

[REACH Declaration](#)

---

**Eu Rohs Directive**

Pro-active compliance (Product out of EU RoHS legal scope)

---

**China Rohs Regulation**

[China RoHS declaration](#)

---

**Environmental Disclosure**

[Product Environmental Profile](#)

---

**Weee**

The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

---

**Circularity Profile**

[End of Life Information](#)


---

Dimensions Drawings

Modules Mounted on Racks

---

Dimensions

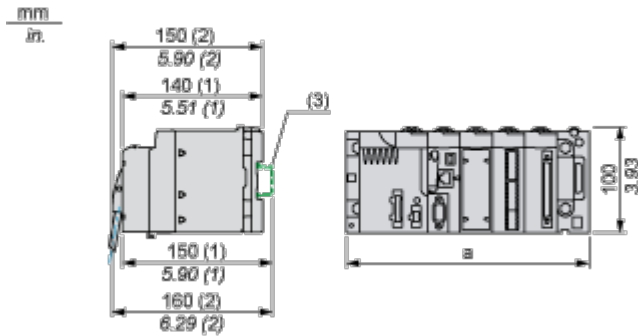

- (1) With removable terminal block (cage, screw or spring).
- (2) With FCN connector.
- (3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.

Rack references	a in mm	a in in.
BMXXBP0400 and BMXXBP0400H	242.4	09.54
BMXXBP0600 and BMXXBP0600H	307.6	12.11
BMXXBP0800 and BMXXBP0800H	372.8	14.68
BMXXBP1200 and BMXXBP1200H	503.2	19.81

Image of product / Alternate images

Alternative

---



