



72 x 72 mm

Features :

- ▶ True RMS measurement
- ▶ Analog style bar graph for voltage representation
- ▶ Selector switch for page selection
- ▶ CE & RoHS Certified


Certifications : CE 

Technical specifications


Display specifications	
Display	7 Segment LCD
Digits	3
Digit height	0.56" (14.2 mm)
Display range	0 – 516V
Resolution	1V
Input specifications	
Electrical connection	3Ø-3 Wire, 3Ø-4 Wire
Input type	AC
Input current range	50 to 480V
Continuous max. input current	516V
Accuracy	±0.5% of F.S.
Frequency range	50 - 60Hz
Electrical specification	
Installation category	III
High voltage test	2kV AC, 50Hz
IP Protection	IP51 Front only
Sampling rate	3 Samples/Second
Dielectric withstand voltage	2kV AC Between auxiliary supply & measuring input
Rated impulse withstand voltage	2kV (1.2/50µS)
Auxiliary supply specifications	
Auxiliary supply	AC: 240V AC ±20%, (50/60Hz), 110V AC ±20%, (60Hz)
Supply frequency	50/60Hz
Input burden	0.5VA @5A AC
Power consumption	5VA Max
Environment specifications	
Operating temperature	-10°C to +55°C (14°F to 131°F)
Storage Temperature	-20°C to +75°C (-4°F to 167°F)
Humidity (Non - condensing)	Upto 95% RH
Pollution degree	2
Altitude	Upto 2000 meters
Measurement category	CAT III

Mechanical specifications	
Mounting	Panel mount
Bezel size	72mm x 72mm
Overall depth	50mm
Weight	206gm
Torque at terminals	0.68 N-m to 0.79 N-m
Wire gauge at terminals	20 to 14 AWG; 75°C
Mounting position	Vertical

Terminal connections

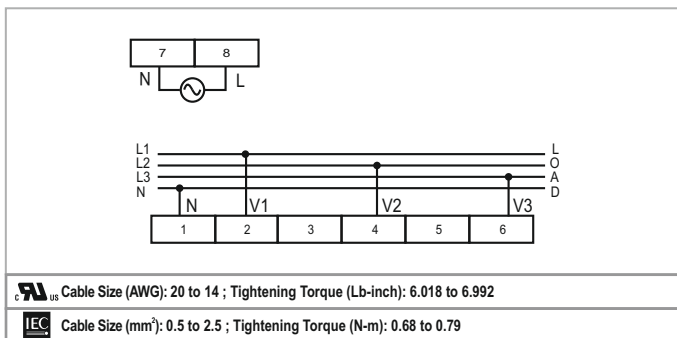

Dimensions (All are in mm)

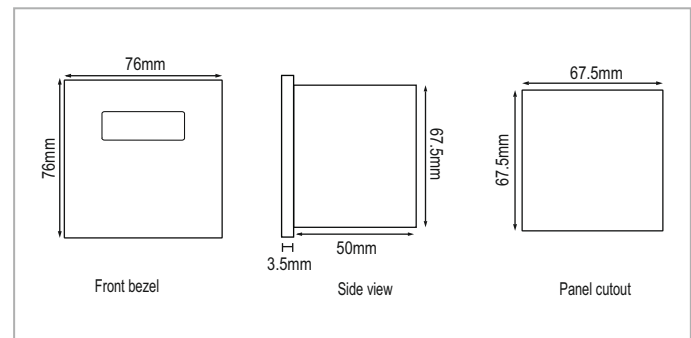

Standards compliance

Applicable EMI / EMC Standards		
Product standard : IEC 61326 - 1		
Category	Standards	Compliance
ESD Immunity	IEC 61000 - 4 - 2	Level IV (Air discharge : 8kV), (Contact discharge : 4kV)
Surge immunity	IEC 61000 - 4 - 5	+ / - 2kV Common mode, (Line to ground)
Radiated susceptibility	IEC 61000 - 4 - 3	Level III, 80 to 1000MHz (10V / m) Level II, 1.4GHz to 2GHz (3V / m) Level I, 2GHz to 2.7GHz (1V / m)
Conducted susceptibility	IEC 61000 - 4 - 6	Level II (3V / m)
Voltage dips and interruptions	IEC 61000 - 4 - 11	Dips : 0% Residual voltage / 1 Cycle (Criteria B), 40% Residual voltage / 10 Cycles 50Hz / 12 Cycles 60Hz (Criteria C), 70% Residual voltage / 25 cycles 50Hz / 30 Cycles 60Hz (Criteria C) Interruptions : 0% Residual voltage / 250 Cycles 50Hz / 300 Cycles 60Hz (Criteria C)
Conducted emission	CISPR - 11	
Radiated emission	CISPR - 11	
Electrical fast transient	IEC 61000 - 4 - 4	Level III (2kV)

Ordering information

Product code	Supply voltage	Certification
MV2307-230V-CE	240V AC $\pm 20\%$	CE
MV2307-110V-CE	110V AC, $\pm 20\%$	CE 