

## ADMIRAL AD 1052

Order Code: 1330106

Hand Detection Safety Light Curtain with Automatic Restart



**Safety level**

Type 4 - PL e

**Protected height (mm)**

1060

**Resolution (mm)**

20

**Max. range (m)**

18

**Restart**

Automatic

**Functioning system**

Emitter / Receiver

## Technical Description

Safety Light Curtain: Type 4, SILCL 3, PL e, Cat. 4

Cross Section: 35 x 45 mm

Hardware configuration: no programming necessary, easy to install and replace

Connection and configuration through M12 connectors

Unshielded cables up to 100 m can be used to connect the Safety Light Curtain

What's in the Box: Emitter, Receiver and Standard Fastening Brackets

## Features

Safety level	Type 4 - PL e
Protected height (mm)	1060
Resolution (mm)	20
Max. range (m)	18
Restart	Automatic
Functioning system	Emitter / Receiver
Safety level (SIL / PL)	Type 4 - SILCL 3 - PL e - Cat. 4
Operating temperature (°C)	0 ... 55
Response time (ms)	17
Number of beams	105
Max. length of the connection cables (m)	
Signalling	7 segment display and LEDs for light curtain's status and diagnostics
Safety output type	2 fail-safe PNP (500 mA at 24 VDC) with protection against short circuit, overload and reverse polarity
Connections	M12 5-pole connectors
MTTFD (ISO13849) years	81,96
PFHD (IEC 61508)	1,94E-08
Safety outputs	2 OSSD PNP (500 mA at 24 VDC)
Safety functions	With external module
Detection	Hand
Operating Range (m)	6 or 18 selectable

Protective enclosures	None
Packaging dimensions HxLxW (mm)	145 x 1230 x 200

Product class	C
Custom tariff	85365019


## Electrical data

Power supply (VDC)	24 ± 20%
--------------------	----------

## Mechanical data

Overall height (mm)	1161
Cross section dimensions (mm)	35 x 45
Degree of protection	IP65
Fastening	Back slot, side slot with set of LS type brackets (included) or to the top and lower end with SFB swivel brackets (optional)
Gross weight (g)	5492,86

Technical drawings

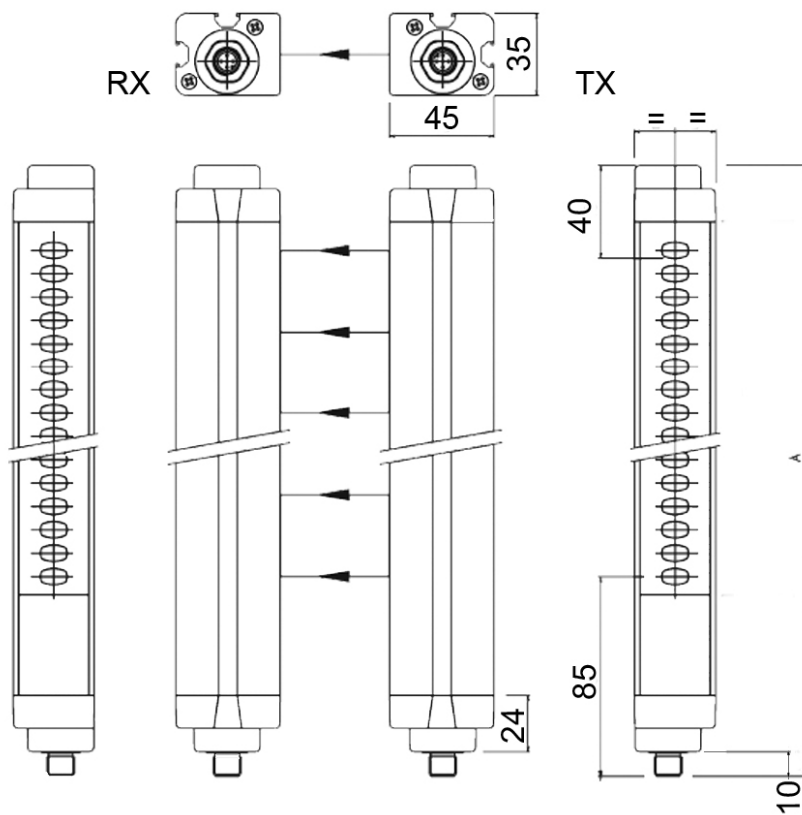

**Certificates**

