

## ADMIRAL AD 452

Order Code: 1330102

Hand Detection Safety Light Curtain with Automatic Restart



**Safety level**

Type 4 - PL e

**Protected height (mm)**

460

**Resolution (mm)**

20

**Max. range (m)**

18

**Restart**

Automatic

**Functioning system**

Emitter / Receiver

## Technical Description

Safety Light Curtain: Type 4, SILCL 3, PL e, Cat. 4

Cross Section: 35 x 45 mm

Hardware configuration: no programming necessary, easy to install and replace

Connection and configuration through M12 connectors

Unshielded cables up to 100 m can be used to connect the Safety Light Curtain

What's in the Box: Emitter, Receiver and Standard Fastening Brackets

## Features

Safety level	Type 4 - PL e
Protected height (mm)	460
Resolution (mm)	20
Max. range (m)	18
Restart	Automatic
Functioning system	Emitter / Receiver
Safety level (SIL / PL)	Type 4 - SILCL 3 - PL e - Cat. 4
Operating temperature (°C)	0 ... 55
Response time (ms)	9,5
Number of beams	45
Max. length of the connection cables (m)	
Signalling	7 segment display and LEDs for light curtain's status and diagnostics
Safety output type	2 fail-safe PNP (500 mA at 24 VDC) with protection against short circuit, overload and reverse polarity
Connections	M12 5-pole connectors
MTTFD (ISO13849) years	100
PFHD (IEC 61508)	1,33E-08
Safety outputs	2 OSSD PNP (500 mA at 24 VDC)
Safety functions	With external module
Detection	Hand
Protective enclosures	None

Packaging dimensions HxLxW (mm)	145 x 600 x 200
------------------------------------	-----------------

Product class	C
---------------	---

Custom tariff	85365019
---------------	----------

## Electrical data

Power supply (VDC)	24 ± 20%
--------------------	----------

## Mechanical data

Overall height (mm)	561
---------------------	-----


Cross section dimensions (mm)	35 x 45
-------------------------------	---------

Degree of protection	IP65
----------------------	------

Fastening	Back slot, side slot with set of LS type brackets (included) or to the top and lower end with SFB swivel brackets (optional)
-----------	--

Gross weight (g)	2889,56
------------------	---------

Technical drawings

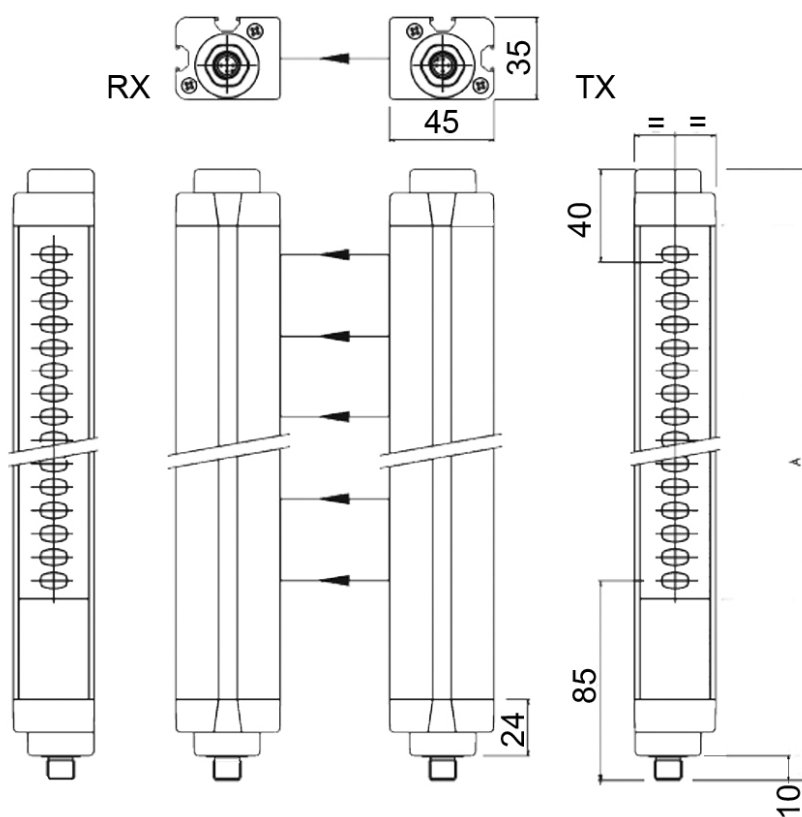

**Certificates**

