


ADMIRAL AX 1052 S

Order Code: 1334146

Hand Detection Safety Light Curtain for Cascading Connection with Automatic/Manual Restart and EDM (Slave)

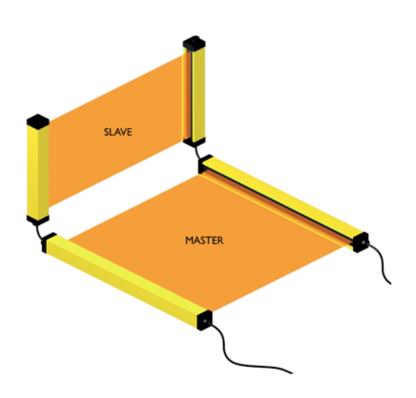

Safety level

Type 4 - PL e

Protected height (mm)

1060

Resolution (mm)

20

Max. range (m)

18

Restart

Built-in - User selectable automatic or manual

Functioning system

Emitter / Receiver

Master Slave Models Ves

Technical Description

Safety Light Curtain: Type 4, SILCL 3, PL e, Cat. 4

Cross Section: 35 x 45 mm

Hardware configuration: no programming necessary, easy to install and replace

Connection and configuration through M12 connectors

Unshielded cables up to 100 m can be used to connect the Safety Light Curtain

What's in the Box: Emitter, Receiver and Standard Fastening Brackets



Features

0 () 1	T 4 D
Safety level	Type 4 - PL e
Protected height (mm)	1060
Resolution (mm)	20
Max. range (m)	18
Restart	Built-in - User selectable automatic or manual
Functioning system	Emitter / Receiver
Master Slave Models	yes
Safety level (SIL / PL)	Type 4 - SILCL 3 - PL e - Cat. 4
Operating temperature (°C)	0 55
Response time (ms)	See technical manual
Number of beams	105
Max. length of the connection	50
cables (m)	
Signalling	7 segment display and LEDs for light curtain's status and
	diagnostics
Safety output type	
Salety output type	2 fail-safe PNP (500 mA at 24 VDC) with protection against
Salety output type	2 fail-safe PNP (500 mA at 24 VDC) with protection against short circuit, overload and reverse polarity
Connections	, , ,
	short circuit, overload and reverse polarity
Connections	short circuit, overload and reverse polarity M12 5-pole connectors
Connections MTTFD (ISO13849) years	short circuit, overload and reverse polarity M12 5-pole connectors 81,96
Connections MTTFD (ISO13849) years PFHD (IEC 61508)	short circuit, overload and reverse polarity M12 5-pole connectors 81,96 1,94E-08



Protective enclosures None

Packaging dimensions HxLxW 145 x 1230 x 200

(mm)

Product class C

Custom tariff 85365019

Electrical data

Power supply (VDC) 24 ± 20%

Mechanical data

Overall height (mm) 1161

Cross section dimensions (mm) 35 x 45

Degree of protection IP65


Fastening Back slot, side slot with set of LS type brackets (included) or to

the top and lower end with SFB swivel brackets (optional)

Gross weight (g) 5492,86



Technical drawings

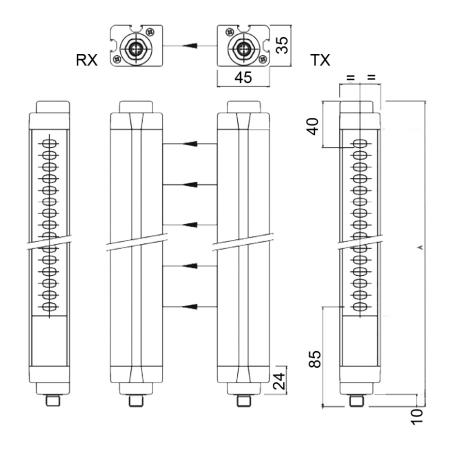



Certificates











