
ADMIRAL AX 151 S

Order Code: 1334040

Finger Detection Safety Light Curtain for Cascading Connection with Automatic/Manual Restart and EDM (Slave)

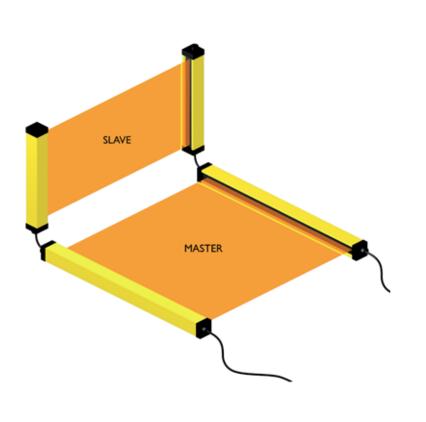

Safety level Type 4 - PL e

Protected height (mm) 160

Resolution (mm) 14

Max. range (m) 5

Restart

Built-in - User selectable automatic or manual

Functioning system Emitter / Receiver

Master Slave Models yes

Technical Description

Safety Light Curtain: Type 4, SILCL 3, PL e, Cat. 4

Cross Section: 35 x 45 mm

Hardware configuration: no programming necessary, easy to install and replace Connection and configuration through M12 connectors

Unshielded cables up to 100 m can be used to connect the Safety Light Curtain What's in the Box: Emitter, Receiver and Standard Fastening Brackets

EXAMPLE REPRESENT OF STATE CONTACT STATE STATE CONTACT STATE STATE

Features

Safety level	Type 4 - PL e
Protected height (mm)	160
Resolution (mm)	14
Max. range (m)	5
Restart	Built-in - User selectable automatic or manual
Functioning system	Emitter / Receiver
Master Slave Models	yes
Safety level (SIL / PL)	Type 4 - SILCL 3 - PL e - Cat. 4
Operating temperature (°C)	055
Response time (ms)	See technical manual
Number of beams	15
Max. length of the connection	50
cables (m)	
Signalling	7 segment display and LEDs for light curtain's status and
	diagnostics
Safety output type	2 fail-safe PNP (500 mA at 24 VDC) with protection against
	short circuit, overload and reverse polarity
Connections	M12 5-pole connectors
MTTFD (ISO13849) years	100
PFHD (IEC 61508)	1,02E-08
Safety outputs	2 OSSD PNP (500 mA at 24 VDC)
Safety functions	Integrated
Detection	Finger
ADMIRAL AX 151 S	

Pag. 2/5

EXAMPLE R Your future's safe!

Protective enclosures	None
Packaging dimensions HxLxW	145 x 300 x 200
(mm)	
Product class	C
Custom tariff	85365019

Electrical data

Power supply (VDC)	24 ± 20%
--------------------	----------

Mechanical data


Overall height (mm)	261
Cross section dimensions (mm)	35 x 45
Degree of protection	IP65
Fastening	Back slot, side slot with set of LS type brackets (included) or to
	the top and lower end with SFB swivel brackets (optional)
Gross weight (g)	1704,56

ADMIRAL AX 151 S

Pag. 3/5



Technical drawings

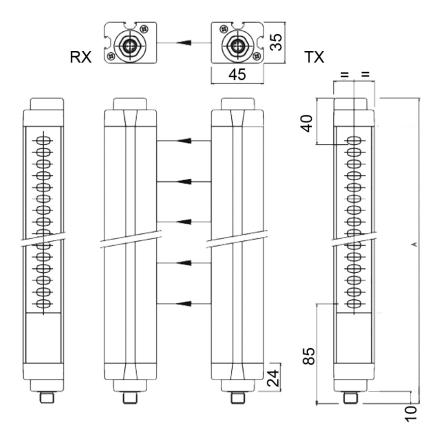

ADMIRAL AX 151 S

Pag. 4/5



Certificates



ADMIRAL AX 151 S

