

Body Detection Safety Light Curtain with Automatic/Manual Restart and EDM



Safety level Type 2 - PL c

Protected height (mm) 1060

Resolution (mm) 50

Max. range (m) 12

Restart

Built-in - User selectable automatic or manual

Functioning system Emitter / Receiver

Technical Description

Compact Safety Light Curtain: Type 2, SIL 1, SILCL 1, PL c, Cat. 2 Cross Section: 28 x 30 mm No blind area on one side Hardware configuration: no programming necessary, easy to install and replace Connection and configuration through M12 connectors Unshielded cables up to 100 m can be used to connect the Safety Light Curtain What's in the Box: Emitter, Receiver and Standard Fastening Brackets

EOS2 1055 X

Pag. 1/5

EXAMPLE R Your future's safe!

Features

Safety level	Type 2 - PL c
Protected height (mm)	1060
Resolution (mm)	50
Controlled height (mm)	1050
Max. range (m)	12
Restart	Built-in - User selectable automatic or manual
Functioning system	Emitter / Receiver
Safety level (SIL / PL)	Type 2 - SIL 1 - SILCL 1 - PL c - Cat. 2
Operating temperature (°C)	- 30 55
Response time (ms)	9
Number of beams	28
Max. length of the connection	100 (50 between Master and Slave)
cables (m)	
Signalling	LEDs for light curtain's status and diagnostics
Safety output type	2 fail-safe PNP (400 mA at 24 VDC) with protection against
	short circuit, overload and reverse polarity
Connections	M12 5-pole connector (emitter), M12 8-pole connector
	(receiver)
MTTFD (ISO13849) years	270,2
PFHD (IEC 61508)	3,92E-08
Safety outputs	2 OSSD PNP (400 mA at 24 VDC)
Safety functions	Integrated
Detection	Body
EOS2 1055 X	

Pag. 2/5

EXAMPLE R Your future's safe!

Protective enclosures	None
Packaging dimensions HxLxW	145 x 1170 x 200
(mm)	
Product class	C
Custom tariff	85365019

Electrical data


Power supply (VDC)	24 ± 20%
--------------------	----------

Mechanical data

Overall height (mm)	1113
Cross section dimensions (mm)	28 x 30
Degree of protection	IP65 - IP67
Fastening	Back slot with set of LE type brackets (included) or to the top
	and lower end with swivel brackets SFB E (optional)
Gross weight (g)	3600,26



Technical drawings

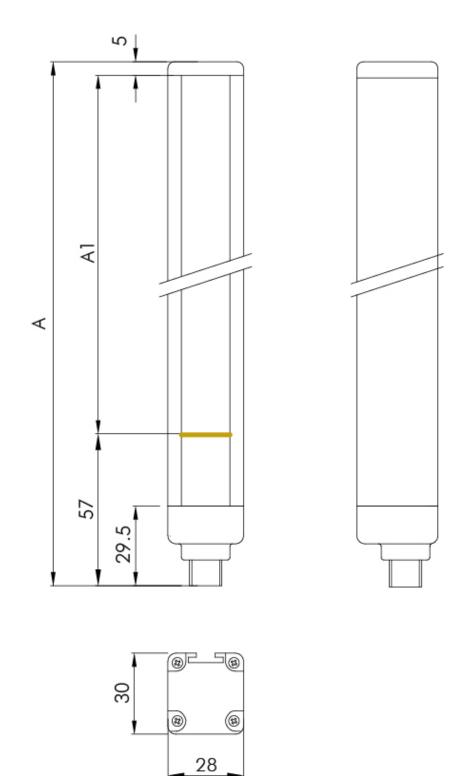


EOS2 1055 X

Pag. 4/5



Certificates



EOS2 1055 X

