EOS2 309 X

Order Code: 1320511

Body Detection Safety Light Curtain with Automatic/Manual Restart and EDM



Safety level

Type 2 - PL c

Protected height (mm)

310

Resolution (mm)

90

Max. range (m)

12

Restart

Built-in - User selectable automatic or manual

Functioning system

Emitter / Receiver

Technical Description

Compact Safety Light Curtain: Type 2, SIL 1, SILCL 1, PL c, Cat. 2

Cross Section: 28 x 30 mm No blind area on one side

Hardware configuration: no programming necessary, easy to install and replace

Connection and configuration through M12 connectors

Unshielded cables up to 100 m can be used to connect the Safety Light Curtain

What's in the Box: Emitter, Receiver and Standard Fastening Brackets

EOS2 309 X



Features

| Safety level | Type 2 - PL c |
|-------------------------------|--|
| Protected height (mm) | 310 |
| Resolution (mm) | 90 |
| Controlled height (mm) | 300 |
| Max. range (m) | 12 |
| Restart | Built-in - User selectable automatic or manual |
| Functioning system | Emitter / Receiver |
| Safety level (SIL / PL) | Type 2 - SIL 1 - SILCL 1 - PL c - Cat. 2 |
| Operating temperature (°C) | - 30 55 |
| Response time (ms) | 3,5 |
| Number of beams | 4 |
| Max. length of the connection | 100 (50 between Master and Slave) |
| cables (m) | |
| Signalling | LEDs for light curtain's status and diagnostics |
| Safety output type | 2 fail-safe PNP (400 mA at 24 VDC) with protection against |
| | short circuit, overload and reverse polarity |
| Connections | M12 5-pole connector (emitter), M12 8-pole connector |
| | (receiver) |
| MTTFD (ISO13849) years | 536,2 |
| PFHD (IEC 61508) | 1,83E-08 |
| Safety outputs | 2 OSSD PNP (400 mA at 24 VDC) |
| Safety functions | Integrated |
| Detection | Body |



Protective enclosures None

Packaging dimensions HxLxW 145 x 390 x 200

(mm)

Product class C

Custom tariff 85365019

Electrical data

Power supply (VDC) $24 \pm 20\%$

Mechanical data

Overall height (mm) 363

Cross section dimensions (mm) 28 x 30

Degree of protection IP65 - IP67


Fastening Back slot with set of LE type brackets (included) or to the top


and lower end with swivel brackets SFB E (optional)


Gross weight (g) 1464,46



Technical drawings

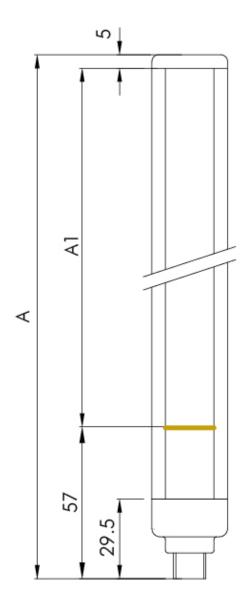







Certificates















