

EOS4 1351 XT

Order Code: 1310855

Finger Detection Safety Light Curtain with Automatic/Manual Restart and EDM. Resistant to High Vibrations



Safety level

Type 4 - PL e

Protected height (mm)

1360

Resolution (mm)

14

Max. range (m)

6

Restart

Built-in - User selectable automatic or manual

Functioning system

Emitter / Receiver

Technical Description

Compact Safety Light Curtain: Type 4, SIL 3, SILCL 3, PL e, Cat. 4

Cross Section: 28 x 30 mm

No blind area on one side

Hardware configuration: no programming necessary, easy to install and replace

Connection and configuration through M12 connectors

Unshielded cables up to 100 m can be used to connect the Safety Light Curtain

What's in the Box: Emitter, Receiver and Standard Fastening Brackets

Features

Safety level	Type 4 - PL e
Protected height (mm)	1360
Resolution (mm)	14
Controlled height (mm)	1350
Max. range (m)	6
Restart	Built-in - User selectable automatic or manual
Functioning system	Emitter / Receiver
Safety level (SIL / PL)	Type 4 - SIL 3 - SILCL 3 - PL e - Cat. 4
Operating temperature (°C)	- 30 ... 55
Response time (ms)	18
Number of beams	135
Max. length of the connection cables (m)	100
Signalling	LEDs for light curtain's status and diagnostics
Safety output type	2 fail-safe PNP (400 mA at 24 VDC) with protection against short circuit, overload and reverse polarity
Connections	M12 5-pole connector (emitter), M12 8-pole connector (receiver)
MTTFD (ISO13849) years	277,8
PFHD (IEC 61508)	2,18E-08
Safety outputs	2 OSSD PNP (400 mA at 24 VDC)
Safety functions	With external module
Special versions	High vibrations

EOS4 1351 XT

Detection	Finger
-----------	--------

Operating Range (m)	6
---------------------	---

Protective enclosures	None
-----------------------	------

Packaging dimensions HxLxW (mm)	0 x 0 x 0
------------------------------------	-----------

Product class	C
---------------	---

Custom tariff	85365019
---------------	----------

Electrical data

Power supply (VDC)	24 ± 20%
--------------------	----------

Mechanical data


Overall height (mm)	1413
---------------------	------

Cross section dimensions (mm)	28 x 30
-------------------------------	---------

Degree of protection	IP65 - IP67
----------------------	-------------

Fastening	Back slot with set of LE type brackets (included) or to the top and lower end with swivel brackets SFB E (optional)
-----------	---

Technical drawings

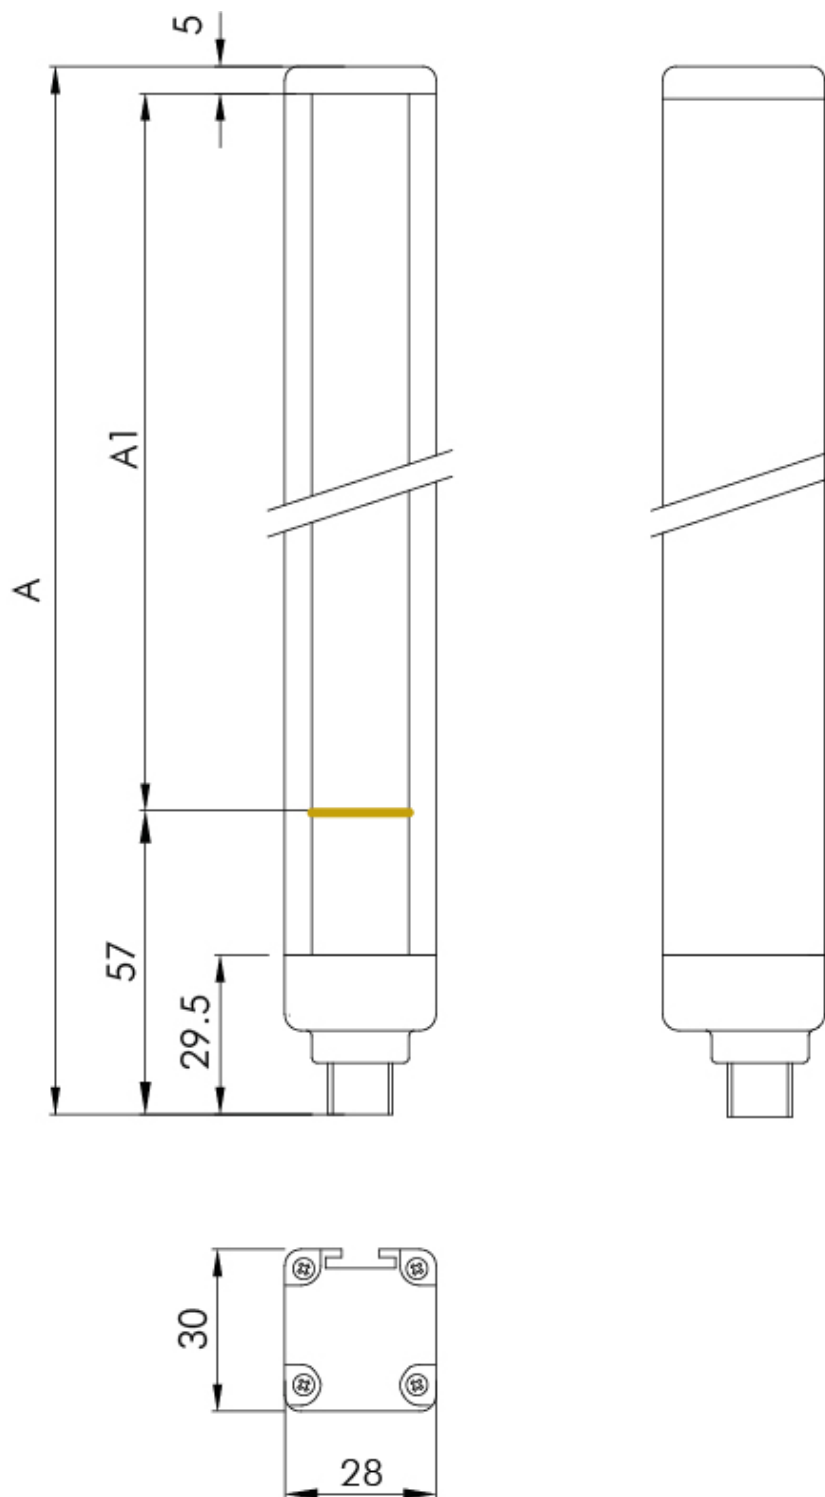

Certificates

