

Hand Detection Safety Light Curtain with Automatic/Manual Restart and EDM



Safety level Type 4 - PL e

Protected height (mm) 1810

Resolution (mm) 30

Max. range (m) 12

#### Restart

Built-in - User selectable automatic or manual

Functioning system Emitter / Receiver

#### **Technical Description**

Compact Safety Light Curtain: Type 4, SIL 3, SILCL 3, PL e, Cat. 4 Cross Section: 28 x 30 mm No blind area on one side Hardware configuration: no programming necessary, easy to install and replace Connection and configuration through M12 connectors Unshielded cables up to 100 m can be used to connect the Safety Light Curtain What's in the Box: Emitter, Receiver and Standard Fastening Brackets

EOS4 1803 X

# **EXAMPLE REPORT** Your future's safe!

### **Features**

| r selectable automatic or manual<br>reiver<br>3 - SILCL 3 - PL e - Cat. 4<br>t curtain's status and diagnostics<br>IP (400 mA at 24 VDC) with protection against<br>overload and reverse polarity<br>connector (emitter), M12 8-pole connector<br>P (400 mA at 24 VDC) |
|--|
| eeiver<br>3 - SILCL 3 - PL e - Cat. 4<br>t curtain's status and diagnostics<br>IP (400 mA at 24 VDC) with protection against<br>overload and reverse polarity<br>connector (emitter), M12 8-pole connector   |
| eeiver<br>3 - SILCL 3 - PL e - Cat. 4<br>t curtain's status and diagnostics<br>IP (400 mA at 24 VDC) with protection against<br>overload and reverse polarity<br>connector (emitter), M12 8-pole connector   |
| eeiver<br>3 - SILCL 3 - PL e - Cat. 4<br>t curtain's status and diagnostics<br>IP (400 mA at 24 VDC) with protection against<br>overload and reverse polarity  |
| eeiver<br>3 - SILCL 3 - PL e - Cat. 4<br>t curtain's status and diagnostics<br>IP (400 mA at 24 VDC) with protection against<br>overload and reverse polarity  |
| eeiver<br>3 - SILCL 3 - PL e - Cat. 4<br>t curtain's status and diagnostics<br>IP (400 mA at 24 VDC) with protection against<br>overload and reverse polarity  |
| eeiver<br>3 - SILCL 3 - PL e - Cat. 4<br>t curtain's status and diagnostics<br>IP (400 mA at 24 VDC) with protection against<br>overload and reverse polarity  |
| eeiver<br>3 - SILCL 3 - PL e - Cat. 4<br>t curtain's status and diagnostics<br>JP (400 mA at 24 VDC) with protection against   |
| eeiver<br>3 - SILCL 3 - PL e - Cat. 4  |
| æiver<br>3 - SILCL 3 - PL e - Cat. 4   |
| eiver  |
|  |
| r selectable automatic or manual   |
|  |
|  |
|  |
|  |
|  |
| 9  |
|  |

Pag. 2/5

# **EXAMPLE R** Your future's safe!

| Protective enclosures      | None             |
|----------------------------|------------------|
| Packaging dimensions HxLxW | 145 x 1920 x 200 |
| (mm)                       |                  |
| Product class              | С                |
| Custom tariff              | 85365019         |
|                            |                  |

### **Electrical data**


| Power supply (VDC) | 24 ± 20% |
|--------------------|----------|
|--------------------|----------|

## **Mechanical data**

| Overall height (mm)           | 1863  |
|-------------------------------|---|
| Cross section dimensions (mm) | 28 x 30   |
| Degree of protection          | IP65 - IP67   |
| Fastening                     | Back slot with set of LE type brackets (included) or to the top |
|                               | and lower end with swivel brackets SFB E (optional)             |
| Gross weight (g)              | 5638,76   |



# **Technical drawings**

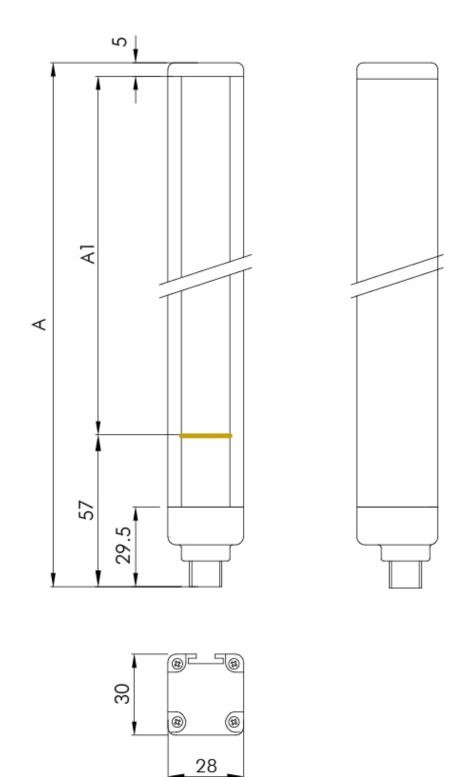

EOS4 1803 X

Pag. 4/5



### Certificates

















EOS4 1803 X

