

## MOSAIC MI8O4C

Order Code: 1100111

Additional I/O Expansion Unit, 8 Inputs 4 single OSSD or 2 pairs (SIL 3), Clamp Terminal Blocks



**Safety level**

PL e

**Safety inputs**

8 digital inputs

**Safety outputs**

4 single OSSD, or 2 pairs  
(400 mA)

**Status outputs**

4 PNP (100 mA)

**Test outputs**

4

## Technical Description

Additional Input/Output units

8 digital inputs, 2 inputs for Start/Restart interlock and external device monitoring (EDM), 4 single OSSD safety outputs or 2 pairs, 2 status outputs, 4 test outputs

## Features

Safety level	PL e
Safety inputs	8 digital inputs
Safety level (SIL / PL)	SIL 3 - SILCL 3 - PL e - Cat. 4
Operating temperature (°C)	- 10 ... 55
Signalling	LEDs indication for operating status and fault diagnosis. LED indication of the: inputs, OSSD outputs and status outputs condition
Safety output type	4 single OSSD, or 2 pairs (PNP - 400mA at 24 VDC) with protection against short circuit, overload and reverse polarity
Connections	Removable terminal blocks, clamp contacts
MTTFD (ISO13849) years	30 ... 100
PFHD (IEC 61508)	1,32E-08
Safety outputs	4 single OSSD, or 2 pairs (400 mA)
Status outputs	4 PNP (100 mA)
Test outputs	4
Storage temperature (°C)	-20 ... +85
MSC connector provided	Yes
Connection with MSC BUS	Yes
Start/Restart inputs and EDM	Up to 4
Packaging dimensions HxLxW (mm)	36 x 127 x 113
Product class	C
Custom tariff	85371091

## Electrical data

Power supply (VDC)	24 ± 20%
--------------------	----------

## Mechanical data


Dimensions HxWxD (mm)	108 x 22,5 x 114,5
-----------------------	--------------------

Degree of protection	IP20 for housing - IP2X for terminal block
----------------------	--

Fastening	35 mm DIN rail fastening according to EN 50022-35 standard
-----------	--

Gross weight (g)	185,4
------------------	-------

Technical drawings

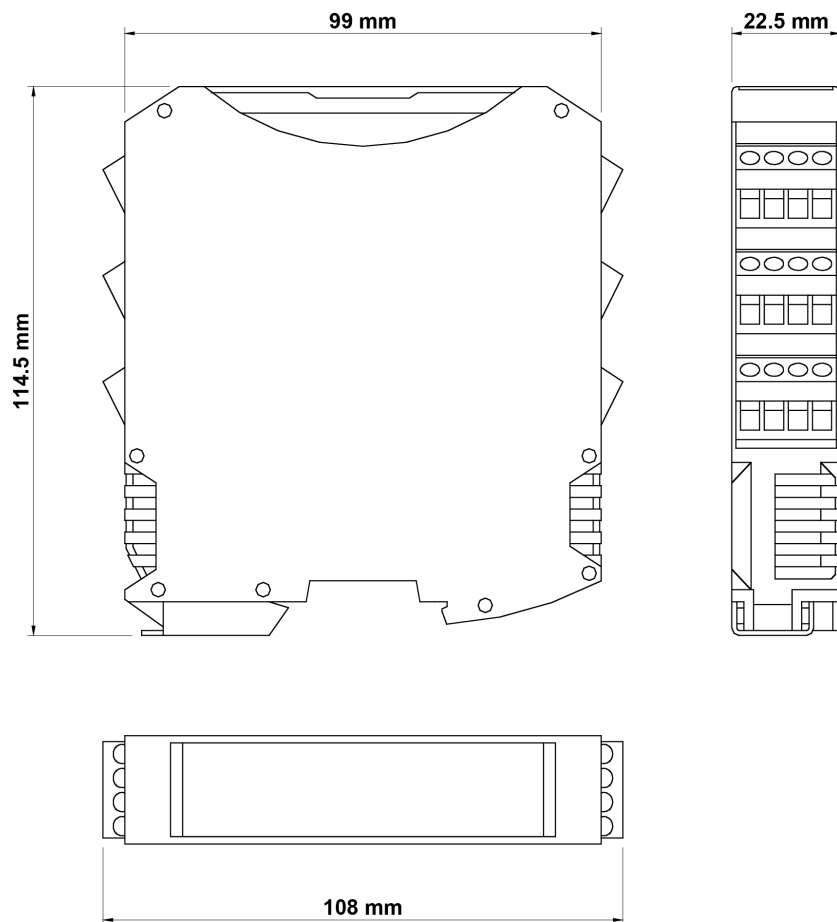

**Certificates**

