## **MOSAIC MR4**

Order Code: 1100041

Safety Relay Expansion Unit, 4 Safety Relays (4 NO+2 NC contacts), Screw Terminal Blocks



Safety level

PL e

Safety relay outputs

4 NO + 2 NC (6A at 250 VAC)

# **Technical Description**

The MR4 Expansion Units do not require MSC as they are wired directly to the selected OSSD



#### **Features**

Safety level	PL e
Safety level (SIL / PL)	SIL 3 - SILCL 3 - PL e - Cat. 4
Operating temperature (°C)	- 10 55
Signalling	LEDs indication for operating status and fault diagnosis. LED
	indication of the inputs condition
Connections	Removable terminal blocks, screw contacts
MTTFD (ISO13849) years	The values depend on the type of use. Refer to the technical
	manual
PFHD (IEC 61508)	The values depend on the type of use. Refer to the technical
	manual
Safety relay outputs	4 NO + 2 NC (6A at 250 VAC)
Safety relay outputs Storage temperature (°C)	4 NO + 2 NC (6A at 250 VAC) -20 +85
Storage temperature (°C)	-20 +85
Storage temperature (°C) Housing for MCM	-20 +85 No
Storage temperature (°C)  Housing for MCM  USB input	-20 +85 No No
Storage temperature (°C)  Housing for MCM  USB input  Packaging dimensions HxLxW	-20 +85 No No

### **Electrical data**

### **Mechanical data**

**MOSAIC MR4** 




Dimensions HxWxD (mm)	108 x 22,5 x 114,5
Degree of protection	IP20 for housing - IP2X for terminal block
Fastening	35 mm DIN rail fastening according to EN 50022-35 standard
Gross weight (g)	230,8

**MOSAIC MR4** 



# **Technical drawings**

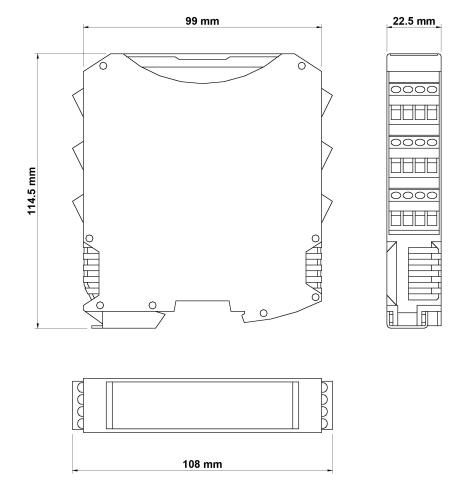



## **Certificates**















