

Order Code: 1100141

Safety Relay Expansion Unit, 4 Safety Relays (4 NO + 2NC contacts), Clamp Terminal Blocks



Safety level PL e

Safety relay outputs 4 NO + 2 NC (6A at 250 VAC)

Technical Description

The MR4 Expansion Units do not require MSC as they are wired directly to the selected OSSD

MOSAIC MR4C

Pag. 1/5

EXAMPLE REPORT Your future's safe!

Features

Safety level	PLe
Safety level (SIL / PL)	SIL 3 - SILCL 3 - PL e - Cat. 4
Operating temperature (°C)	- 10 55
Signalling	LEDs indication for operating status and fault diagnosis. LED
	indication of the inputs condition
Connections	Removable terminal blocks, clamp contacts
MTTFD (ISO13849) years	The values depend on the type of use. Refer to the technical
	manual
PFHD (IEC 61508)	The values depend on the type of use. Refer to the technical
	manual
Safety relay outputs	4 NO + 2 NC (6A at 250 VAC)
Storage temperature (°C)	-20 +85
Storage temperature (°C) Housing for MCM	-20 +85 No
Housing for MCM	No
Housing for MCM USB input	No No
Housing for MCM USB input Packaging dimensions HxLxW	No No

Electrical data

Power supply (VDC) $24 \pm 20\%$

Mechanical data


EXAMPLE REPORT Your future's safe!


Dimensions HxWxD (mm)	108 x 22,5 x 114,5
Degree of protection	IP20 for housing - IP2X for terminal block
Fastening	35 mm DIN rail fastening according to EN 50022-35 standard
Gross weight (g)	230,8






Technical drawings

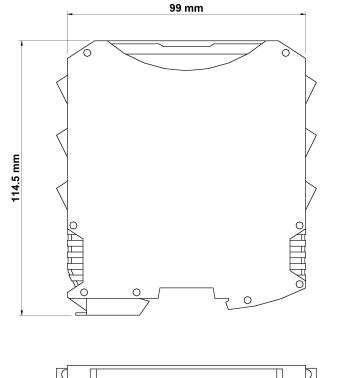





22.5 mm



Certificates













