

AD SR0

Order Code: 1330902

Safety Relay for Safety Light Curtains with Integrated Safety Functions (2 NO + 1 NC contacts)



Safety level

PL e

Safety relay outputs

2 NO + 1 NC (2A at 250 VAC)

Technical Description

Interface relay module for safety light curtains with feedback input for EDM, such as EOS4 X, Admiral AX, EOS2 X, Vision VX/VXL/MXL and Janus

- Guided-contact safety relays
- Additional NC contact line for the monitoring by light curtain (EDM)

Can only be connected to safety sensors equipped with feedback input for monitoring external relays

Features

Safety level	PL e
Safety level (SIL / PL)	PL e - Cat. 4 - Type III C
Operating temperature (°C)	0 ... 55
Response time (ms)	
Signalling	Nothing
Connections	Terminal blocks
Safety devices to be connected	Safety devices with feedback input for external relay monitor (EDM), such us EOS4 X , EOS2 X, Admiral AX, Vision VX/VXL/MXL and Janus
Safety relay outputs	2 NO + 1 NC (2A at 250 VAC)
Packaging dimensions HxLxW (mm)	57 x 158 x 134
Product class	C
Custom tariff	8536490

Electrical data


Power supply (VDC)	24 ± 20%
--------------------	----------

Mechanical data

Dimensions HxWxD (mm)	101 x 35 x 120
Degree of protection	IP2X
Fastening	35 mm DIN rail fastening according to EN 50022-35 standard
Gross weight (g)	229,9

AD SR0

Technical drawings

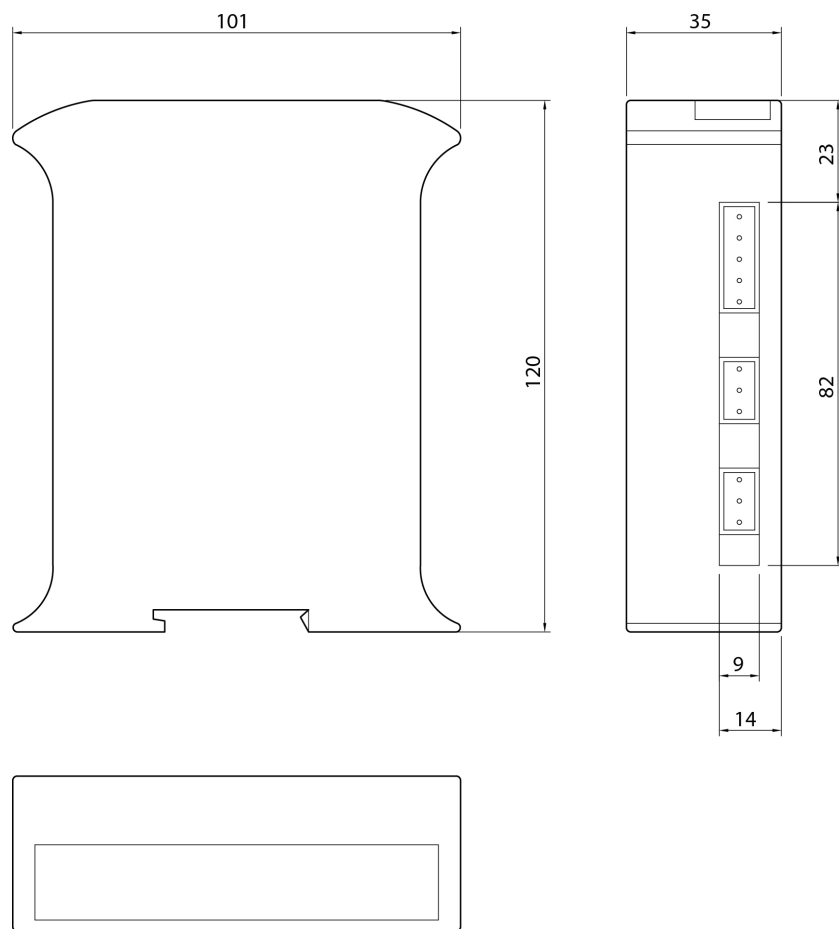

Certificates

