

## **SR E4R C**

Order Code: 1330809

Safety Interface for emergency stop buttons and safety switches with manual monitored Start/Restart command. 2NO. Clamp Terminal Blocks



Safety level

PL e

Safety relay outputs

2 NO (6A at 250 VAC)

## **Technical Description**

Safety interface for monitoring emergency stop buttons and safety switches

With 2 NO guided-contact safety relays

Manual monitored Start/Restart<P>EDM Feedback input for external contactors monitoring. With clamp terminal blocks

## Features

Safety level	PL e
Safety level (SIL / PL)	PL e - Cat. 4
Operating temperature (°C)	-30 ... 55
Response time (ms)	
Signalling	LEDs indication for status and diagnostic: power supply, channel 1 and channel 2
Connections	Removable terminal blocks, clamp contacts
MTTFD (ISO13849) years	The values depend on the type of use. Refer to the technical manual
PFHD (IEC 61508)	The values depend on the type of use. Refer to the technical manual
Safety devices to be connected	Emergency stop buttons and safety switches
Start/Restart	Manual monitored
Min. switching current at 24 VDC (mA)	6
Safety relay outputs	2 NO (6A at 250 VAC)
Product class	C

## Electrical data

Power supply (VDC)	24 ± 20%
--------------------	----------

## Mechanical data

Dimensions HxWxD (mm)	99 x 22,5 x 114,5
-----------------------	-------------------

## SR E4R C


Degree of protection

IP2X

Fastening

35 mm DIN rail fastening according to EN 50022-35 standard

Technical drawings

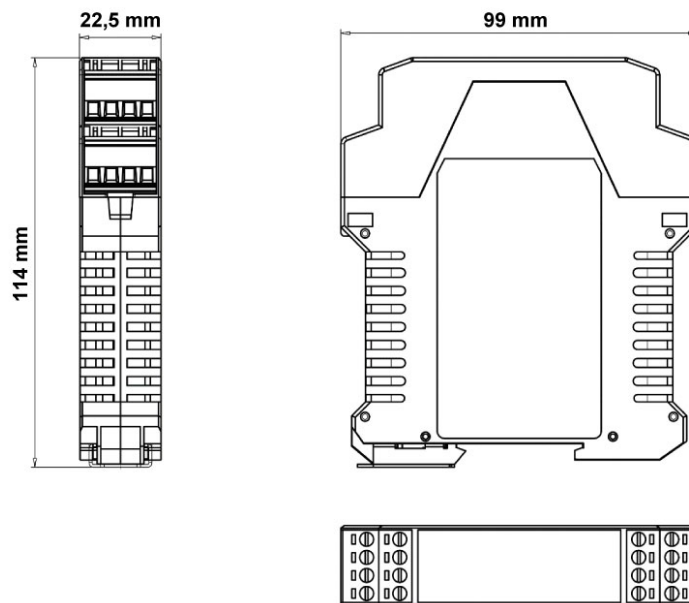

**Certificates**

