

## **SR ZERO C**

Order Code: 1330806

Safety Interface for devices with integrated feedback input for EDM. 2 NO + 1 NC. Screw. Clamp terminal Blocks



Safety level

PL e

Safety relay outputs

2 NO + 1 NC (6A at 250 VAC)

## **Technical Description**

Safety relay modules for safety light curtains with feedback input for EDM, such as EOS4X, Admiral AX, etc.

With forcibly guided contact safety relays, 2 NO + 1 NC<P>The additional NC contact line for monitoring by light curtain (EDM). Whit clamp terminal blocks

## Features

Safety level	PL e
Safety level (SIL / PL)	PL e - Cat. 4
Operating temperature (°C)	- 30 ... 55
Response time (ms)	
Signalling	LEDs indication for input status
Connections	Removable terminal blocks, clamp contacts
MTTFD (ISO13849) years	The values depend on the type of use. Refer to the technical manual
PFHD (IEC 61508)	The values depend on the type of use. Refer to the technical manual
Safety devices to be connected	Safety devices with feedback input for external relay monitor (EDM), such us EOS4 X , EOS2 X, Admiral AX, Vision VX/VXL/MXL and Janus
Safety relay outputs	2 NO + 1 NC (6A at 250 VAC)
Product class	C

## Electrical data


Power supply (VDC)	24 ± 20%
--------------------	----------

## Mechanical data

Dimensions HxWxD (mm)	99 x 22,5 x 114,5
Degree of protection	IP2X
Fastening	35 mm DIN rail fastening according to EN 50438 standard

## SR ZERO C

Technical drawings

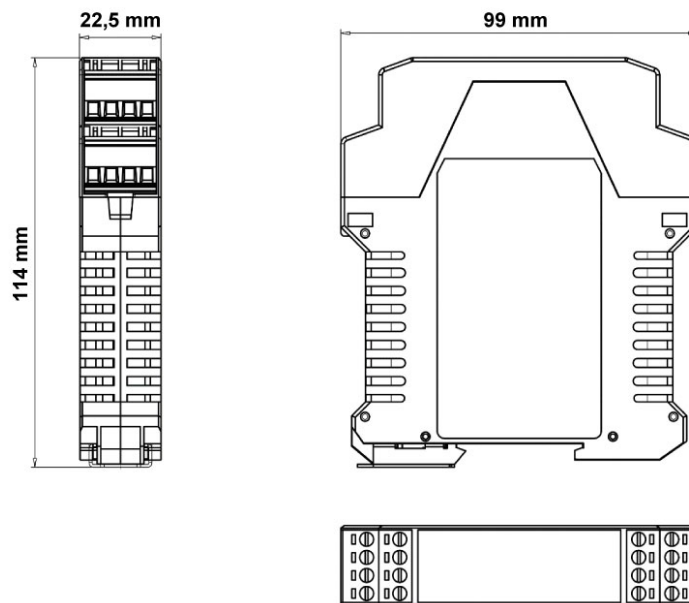

**Certificates**

