

**Overview**

- Reliable intensity-based object detection
- qTeach - tamper-proof, simple teach-in with ferromagnetic tool
- Quick mounting by means of M3 threaded bushes made of stainless steel



Picture similar



**Technical data**

**General data**

Type	Intensity difference
Sensing distance Tw	20 ... 200 mm
Smallest object recognizable typ.	2 mm at 100 mm
Power on indication	LED green
Alignment / soiled lens indicator	Flashing output indicator
Output indicator	LED yellow
Sensing distance adjustment	qTeach
Suppression of reciprocal influence	Yes
Beam type	Point
Alignment optical axis	< 1,5°

**Light Source**

Light source	Pulsed red LED
Wave length	644 nm

**Electrical data**

Response time / release time	< 0.25 ms
Jitter	< 0.06 ms
Voltage supply range +Vs	10 ... 30 VDC

**Electrical data**

Current consumption max. (no load)	40 mA (@ 10 VDC)
Current consumption typ.	16 mA (@ 24 VDC)
Voltage drop Vd	<2 VDC
Output function	Light / dark operate
Output circuit	PNP complementary
Output current	50 mA
Short circuit protection	Yes
Reverse polarity protection	Yes


**Mechanical data**

Width / diameter	8 mm
Height / length	25.1 mm
Depth	15.8 mm
Design	Rectangular
Mechanical mounting	Threaded sleeves M3 (stainless steel)
Housing material	Plastic (ASA, PMMA)
Front (optics)	PMMA
Connection types	Flylead connector M8 4 pin, L=200 mm
Cable characteristics	PVC / PVC 4 x 0.08 mm <sup>2</sup>


**Ambient conditions**

Protection class	IP 67
Operating temperature	-25 ... +50 °C


**Dimension drawing**

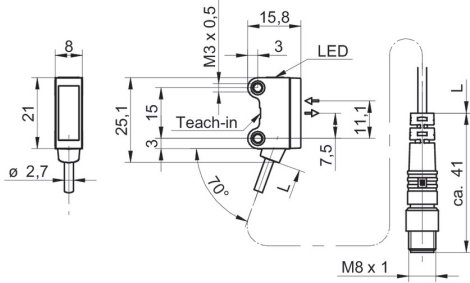


**Relative receiving signal**

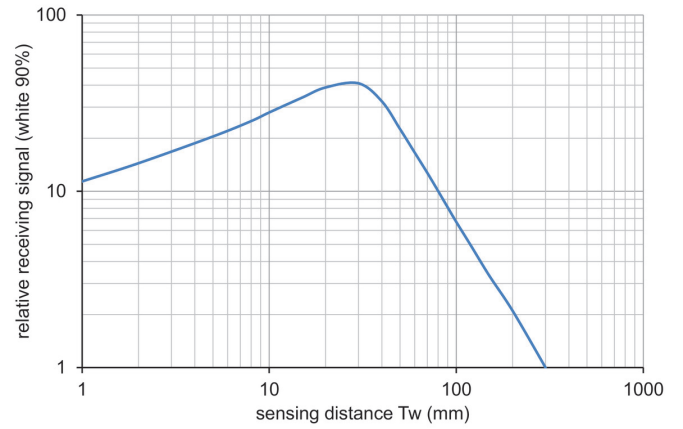

**Connection diagram**

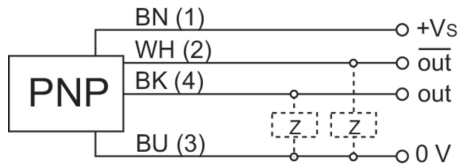

**Pin assignment**



**Beam characteristic (typically)**

