



power contactor, AC-3e/AC-3 300 A, 160 kW / 400 V, without operating mechanism 3-pole, auxiliary contacts 2 NO + 2 NC main circuit: busbar control and auxiliary circuit: screw terminal

| | |
|--|----------------------------|
| product brand name | SIRIUS |
| product designation | Power contactor |
| product type designation | 3RT1 |
| General technical data | |
| size of contactor | S10 |
| product extension | |
| • function module for communication | No |
| • auxiliary switch | Yes |
| power loss [W] for rated value of the current | |
| • at AC in hot operating state | 66 W |
| • at AC in hot operating state per pole | 22 W |
| type of calculation of power loss depending on pole | quadratic |
| insulation voltage | |
| • of main circuit with degree of pollution 3 rated value | 1 000 V |
| • of auxiliary circuit with degree of pollution 3 rated value | 500 V |
| surge voltage resistance | |
| • of main circuit rated value | 8 kV |
| • of auxiliary circuit rated value | 6 kV |
| maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1 | 690 V |
| shock resistance at rectangular impulse | |
| • at AC | 8,5g / 5 ms, 4,2g / 10 ms |
| • at DC | 8,5g / 5 ms, 4,2g / 10 ms |
| shock resistance with sine pulse | |
| • at AC | 13,4g / 5 ms, 6,5g / 10 ms |
| • at DC | 13,4g / 5 ms, 6,5g / 10 ms |
| mechanical service life (operating cycles) | |
| • of contactor typical | 10 000 000 |
| • of the contactor with added electronically optimized auxiliary switch block typical | 5 000 000 |
| • of the contactor with added auxiliary switch block typical | 10 000 000 |
| reference code according to IEC 81346-2 | Q |
| Substance Prohibitance (Date) | |
| SVHC substance name | Lead - 7439-92-1 |
| Weight | 5.917 kg |
| Ambient conditions | |
| installation altitude at height above sea level maximum | 2 000 m |
| ambient temperature | |
| • during operation | -25 ... +60 °C |
| • during storage | -55 ... +80 °C |
| relative humidity minimum | 10 % |

| | |
|--|---------------------|
| relative humidity at 55 °C according to IEC 60068-2-30 maximum | 95 % |
| Main circuit | |
| number of poles for main current circuit | 3 |
| number of NO contacts for main contacts | 3 |
| operating voltage | |
| • at AC-3 rated value maximum | 1 000 V |
| • at AC-3e rated value maximum | 1 000 V |
| operational current | |
| • at AC-1 at 400 V at ambient temperature 40 °C rated value | 330 A |
| • at AC-1 | |
| — up to 690 V at ambient temperature 40 °C rated value | 330 A |
| — up to 690 V at ambient temperature 60 °C rated value | 300 A |
| — up to 1000 V at ambient temperature 40 °C rated value | 150 A |
| — up to 1000 V at ambient temperature 60 °C rated value | 150 A |
| • at AC-3 | |
| — at 400 V rated value | 300 A |
| — at 500 V rated value | 300 A |
| — at 690 V rated value | 280 A |
| — at 1000 V rated value | 95 A |
| • at AC-3e | |
| — at 400 V rated value | 300 A |
| — at 500 V rated value | 300 A |
| — at 690 V rated value | 280 A |
| — at 1000 V rated value | 95 A |
| • at AC-4 at 400 V rated value | 280 A |
| • at AC-5a up to 690 V rated value | 290 A |
| • at AC-5b up to 400 V rated value | 249 A |
| • at AC-6a | |
| — up to 230 V for current peak value n=20 rated value | 292 A |
| — up to 400 V for current peak value n=20 rated value | 292 A |
| — up to 500 V for current peak value n=20 rated value | 292 A |
| — up to 690 V for current peak value n=20 rated value | 280 A |
| — up to 1000 V for current peak value n=20 rated value | 95 A |
| • at AC-6a | |
| — up to 230 V for current peak value n=30 rated value | 195 A |
| — up to 400 V for current peak value n=30 rated value | 195 A |
| — up to 500 V for current peak value n=30 rated value | 195 A |
| — up to 690 V for current peak value n=30 rated value | 195 A |
| — up to 1000 V for current peak value n=30 rated value | 95 A |
| minimum cross-section in main circuit at maximum AC-1 rated value | 185 mm ² |
| operational current for approx. 200000 operating cycles at AC-4 | |
| • at 400 V rated value | 125 A |
| • at 690 V rated value | 115 A |
| operational current | |
| • at 1 current path at DC-1 | |
| — at 24 V rated value | 300 A |
| — at 60 V rated value | 300 A |
| — at 110 V rated value | 33 A |
| — at 220 V rated value | 3.8 A |
| — at 440 V rated value | 0.9 A |
| — at 600 V rated value | 0.6 A |
| • with 2 current paths in series at DC-1 | |
| — at 24 V rated value | 300 A |
| — at 60 V rated value | 300 A |

| | |
|--|-------------|
| — at 110 V rated value | 300 A |
| — at 220 V rated value | 300 A |
| — at 440 V rated value | 4 A |
| — at 600 V rated value | 2 A |
| ● with 3 current paths in series at DC-1 | |
| — at 24 V rated value | 300 A |
| — at 60 V rated value | 300 A |
| — at 110 V rated value | 300 A |
| — at 220 V rated value | 300 A |
| — at 440 V rated value | 11 A |
| — at 600 V rated value | 5.2 A |
| ● at 1 current path at DC-3 at DC-5 | |
| — at 24 V rated value | 300 A |
| — at 60 V rated value | 11 A |
| — at 220 V rated value | 0.6 A |
| — at 440 V rated value | 0.18 A |
| — at 600 V rated value | 0.125 A |
| ● with 2 current paths in series at DC-3 at DC-5 | |
| — at 24 V rated value | 300 A |
| — at 60 V rated value | 300 A |
| — at 110 V rated value | 300 A |
| — at 220 V rated value | 2.5 A |
| — at 440 V rated value | 0.65 A |
| — at 600 V rated value | 0.37 A |
| ● with 3 current paths in series at DC-3 at DC-5 | |
| — at 24 V rated value | 300 A |
| — at 60 V rated value | 300 A |
| — at 110 V rated value | 300 A |
| — at 220 V rated value | 300 A |
| — at 440 V rated value | 1.4 A |
| — at 600 V rated value | 0.75 A |
| operating power | |
| ● at AC-3 | |
| — at 230 V rated value | 90 kW |
| — at 400 V rated value | 160 kW |
| — at 500 V rated value | 200 kW |
| — at 690 V rated value | 250 kW |
| — at 1000 V rated value | 132 kW |
| ● at AC-3e | |
| — at 230 V rated value | 90 kW |
| — at 400 V rated value | 160 kW |
| — at 500 V rated value | 200 kW |
| — at 690 V rated value | 250 kW |
| — at 1000 V rated value | 132 kW |
| operating power for approx. 200000 operating cycles at AC-4 | |
| ● at 400 V rated value | 71 kW |
| ● at 690 V rated value | 112 kW |
| operating apparent power at AC-6a | |
| ● up to 230 V for current peak value n=20 rated value | 110 000 kVA |
| ● up to 400 V for current peak value n=20 rated value | 200 000 VA |
| ● up to 500 V for current peak value n=20 rated value | 250 000 VA |
| ● up to 690 V for current peak value n=20 rated value | 330 000 VA |
| ● up to 1000 V for current peak value n=20 rated value | 160 000 VA |
| operating apparent power at AC-6a | |
| ● up to 230 V for current peak value n=30 rated value | 70 000 VA |
| ● up to 400 V for current peak value n=30 rated value | 130 000 VA |
| ● up to 500 V for current peak value n=30 rated value | 160 000 VA |
| ● up to 690 V for current peak value n=30 rated value | 230 000 VA |
| ● up to 1000 V for current peak value n=30 rated value | 160 000 VA |
| short-time withstand current in cold operating state up to | |

| | | |
|--|---|---|
| 40 °C | <ul style="list-style-type: none"> limited to 1 s switching at zero current maximum limited to 5 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum | 5 524 A; Use minimum cross-section acc. to AC-1 rated value 4 579 A; Use minimum cross-section acc. to AC-1 rated value 3 153 A; Use minimum cross-section acc. to AC-1 rated value 1 883 A; Use minimum cross-section acc. to AC-1 rated value 1 445 A; Use minimum cross-section acc. to AC-1 rated value |
| no-load switching frequency | <ul style="list-style-type: none"> at AC at DC | 2 000 1/h 2 000 1/h |
| operating frequency | <ul style="list-style-type: none"> at AC-1 maximum at AC-2 maximum at AC-3 maximum at AC-3e maximum at AC-4 maximum | 750 1/h 250 1/h 500 1/h 500 1/h 130 1/h |
| Control circuit/ Control | | |
| type of voltage of the control supply voltage | | AC/DC |
| closing delay | <ul style="list-style-type: none"> at AC at DC | 30 ... 95 ms 30 ... 95 ms |
| opening delay | <ul style="list-style-type: none"> at AC at DC | 40 ... 80 ms 40 ... 80 ms |
| arcing time | | 10 ... 15 ms |
| control version of the switch operating mechanism | | Without operating mechanism |
| Auxiliary circuit | | |
| number of NC contacts for auxiliary contacts instantaneous contact | | 2 |
| number of NO contacts for auxiliary contacts instantaneous contact | | 2 |
| operational current at AC-12 maximum | | 10 A |
| operational current at AC-15 | <ul style="list-style-type: none"> at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value | 6 A 3 A 2 A 1 A |
| operational current at DC-12 | <ul style="list-style-type: none"> at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value | 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A |
| operational current at DC-13 | <ul style="list-style-type: none"> at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value | 10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A |
| contact reliability of auxiliary contacts | | 1 faulty switching per 100 million (17 V, 1 mA) |
| UL/CSA ratings | | |
| full-load current (FLA) for 3-phase AC motor | <ul style="list-style-type: none"> at 480 V rated value at 600 V rated value | 302 A 289 A |
| yielded mechanical performance [hp] | <ul style="list-style-type: none"> for 3-phase AC motor <ul style="list-style-type: none"> at 200/208 V rated value at 220/230 V rated value | 100 hp 125 hp |

| | |
|---|--|
| — at 460/480 V rated value | 250 hp |
| — at 575/600 V rated value | 300 hp |
| contact rating of auxiliary contacts according to UL | A600 / Q600 |
| Short-circuit protection | |
| design of the fuse link | |
| <ul style="list-style-type: none"> ● for short-circuit protection of the main circuit <ul style="list-style-type: none"> — with type of coordination 1 required — with type of assignment 2 required ● for short-circuit protection of the auxiliary switch required | gG: 500 A (690 V, 100 kA) gG: 400 A (690 V, 100 kA), aM: 315 A (690 V, 50 kA), BS88: 400 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) |
| Installation/ mounting/ dimensions | |
| mounting position | with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back |
| fastening method | screw fixing |
| height | 210 mm |
| width | 145 mm |
| depth | 202 mm |
| required spacing | |
| <ul style="list-style-type: none"> ● with side-by-side mounting <ul style="list-style-type: none"> — forwards — upwards — downwards — at the side ● for grounded parts <ul style="list-style-type: none"> — forwards — upwards — at the side — downwards ● for live parts <ul style="list-style-type: none"> — forwards — upwards — downwards — at the side | 20 mm 10 mm 10 mm 0 mm 20 mm 10 mm 10 mm 10 mm 20 mm 10 mm 10 mm 10 mm |
| Connections/ Terminals | |
| type of electrical connection | |
| <ul style="list-style-type: none"> ● for main current circuit ● for auxiliary and control circuit ● at contactor for auxiliary contacts ● of magnet coil | Connection bar screw-type terminals Screw-type terminals Screw-type terminals |
| width of connection bar | 25 mm |
| thickness of connection bar | 6 mm |
| diameter of holes | 11 mm |
| number of holes | 1 |
| type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> ● for AWG cables for main contacts | 2/0 ... 500 kcmil |
| connectable conductor cross-section for main contacts | |
| <ul style="list-style-type: none"> ● stranded | 70 ... 240 mm ² |
| connectable conductor cross-section for auxiliary contacts | |
| <ul style="list-style-type: none"> ● solid or stranded ● finely stranded with core end processing | 0.5 ... 4 mm ² 0.5 ... 2.5 mm ² |
| type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> ● for auxiliary contacts <ul style="list-style-type: none"> — solid — solid or stranded — finely stranded with core end processing ● for AWG cables for auxiliary contacts | 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²), max. 2x (0.75 ... 4 mm ²) 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²), max. 2x (0.75 ... 4 mm ²) 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²) 2x (20 ... 16), 2x (18 ... 14), 1x 12 |
| AWG number as coded connectable conductor cross section | |
| <ul style="list-style-type: none"> ● for auxiliary contacts | 18 ... 14 |
| Safety related data | |
| product function | |

| | |
|--|--|
| • mirror contact according to IEC 60947-4-1 | Yes |
| • positively driven operation according to IEC 60947-5-1 | No |
| • suitable for safety function | Yes |
| suitability for use safety-related switching OFF | Yes |
| service life maximum | 20 a |
| test wear-related service life necessary | Yes |
| proportion of dangerous failures | |
| • with low demand rate according to SN 31920 | 40 % |
| • with high demand rate according to SN 31920 | 73 % |
| B10 value with high demand rate according to SN 31920 | 1 000 000 |
| failure rate [FIT] with low demand rate according to SN 31920 | 100 FIT |
| ISO 13849 | |
| device type according to ISO 13849-1 | 3 |
| overdimensioning according to ISO 13849-2 necessary | Yes |
| IEC 61508 | |
| safety device type according to IEC 61508-2 | Type A |
| Electrical Safety | |
| protection class IP on the front according to IEC 60529 | IP00; IP20 with box terminal/cover |
| touch protection on the front according to IEC 60529 | finger-safe, for vertical contact from the front with box terminal/cover |

Approvals Certificates

General Product Approval



[Confirmation](#)



[KC](#)

| General Product Approval | EMV | Functional Safety | Test Certificates | Marine / Shipping |
|--------------------------|-----|-------------------|-------------------|-------------------|
|--------------------------|-----|-------------------|-------------------|-------------------|



[Type Examination Certificate](#)

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



| Marine / Shipping | other |
|-------------------|-------|
|-------------------|-------|



[Confirmation](#)

[Miscellaneous](#)

| other | Railway | Environment |
|-------|---------|-------------|
|-------|---------|-------------|

[Miscellaneous](#)

[Special Test Certificate](#)

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1066-6LA06>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1066-6LA06>





Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1066-6LA06>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1066-6LA06&lang=en

Characteristic: [Tripping characteristics, I_{tr}, Let-through current](#)

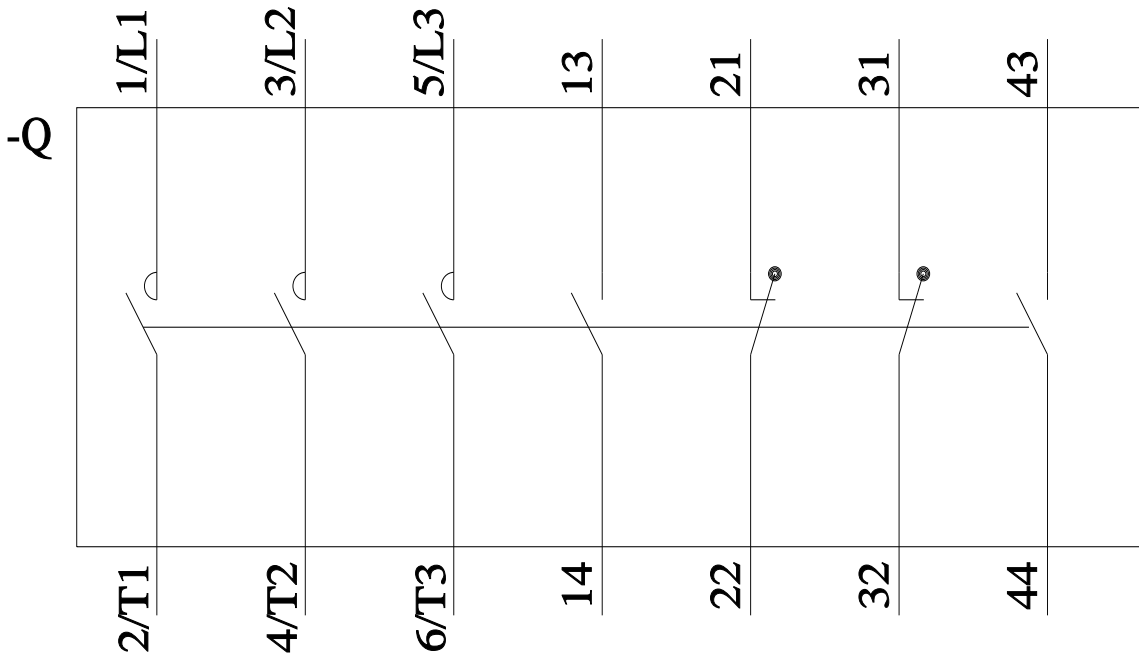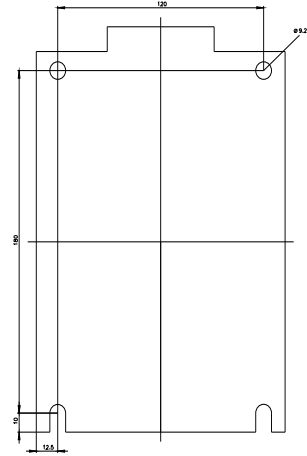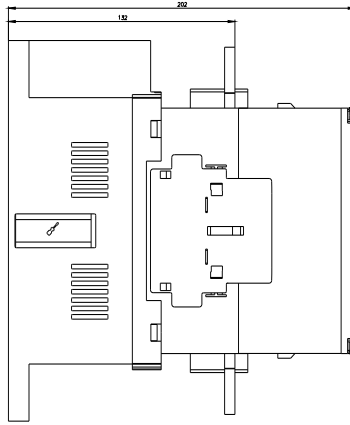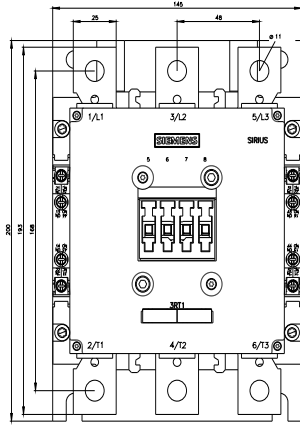

last modified:

