


# **ADMIRAL AX 1503 S**

Order Code: 1334249

Hand Detection Safety Light Curtain for Cascading Connection with Automatic/Manual Restart and EDM (Slave)

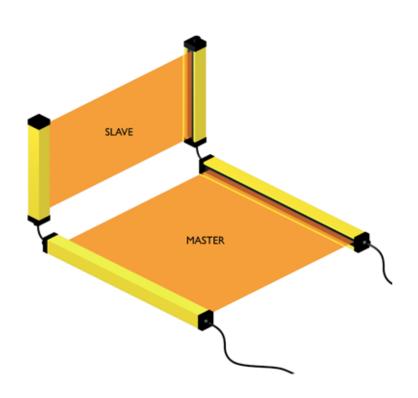

Safety level

Type 4 - PL e

Protected height (mm)

1510

Resolution (mm)

30

Max. range (m)

18

Restart

Built-in - User selectable automatic or manual

**Functioning system** 

Emitter / Receiver

Master Slave Models Ves

## **Technical Description**

Safety Light Curtain: Type 4, SILCL 3, PL e, Cat. 4

Cross Section: 35 x 45 mm

Hardware configuration: no programming necessary, easy to install and replace

Connection and configuration through M12 connectors

Unshielded cables up to 100 m can be used to connect the Safety Light Curtain

What's in the Box: Emitter, Receiver and Standard Fastening Brackets



### **Features**

Safety level	Type 4 - PL e
Protected height (mm)	1510
Resolution (mm)	30
Max. range (m)	18
Restart	Built-in - User selectable automatic or manual
Functioning system	Emitter / Receiver
Master Slave Models	yes
Safety level (SIL / PL)	Type 4 - SILCL 3 - PL e - Cat. 4
Operating temperature (°C)	0 55
Response time (ms)	See technical manual
Number of beams	80
Max. length of the connection	50
cables (m)	
Signalling	7 segment display and LEDs for light curtain's status and
	diagnostics
Safety output type	2 fail-safe PNP (500 mA at 24 VDC) with protection against
	short circuit, overload and reverse polarity
Connections	M12 5-pole connectors
MTTFD (ISO13849) years	91,93
PFHD (IEC 61508)	1,79E-08
Safety outputs	2 OSSD PNP (500 mA at 24 VDC)
Safety functions	Integrated
Detection	Hand



Protective enclosures None

Packaging dimensions HxLxW 145 x 1680 x 200

(mm)

Product class C

Custom tariff 85365019

#### **Electrical data**

Power supply (VDC)  $24 \pm 20\%$ 

#### Mechanical data

Overall height (mm)	1611
Cross section dimensions (mm)	35 x 45
Degree of protection	IP65


Fastening Back slot, side slot with set of LS type brackets (included) or to

the top and lower end with SFB swivel brackets (optional)

Gross weight (g) 7320,36



# **Technical drawings**

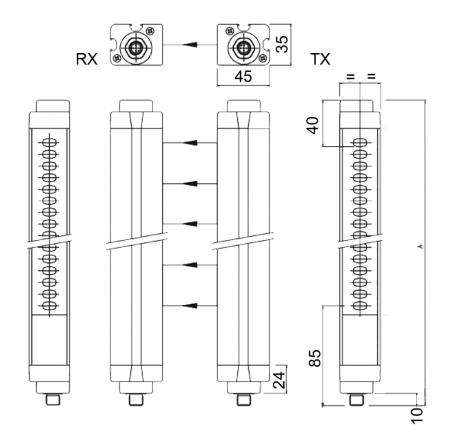



### **Certificates**











