

ADMIRAL AX 1953

Order Code: 1334450

Hand Detection Safety Light Curtain with Automatic/Manual Restart and EDM



Safety level

Type 4 - PL e

Protected height (mm)

Resolution (mm)

30

Max. range (m)

18

Restart

Built-in - User selectable
automatic or manual

Functioning system

Emitter / Receiver

Technical Description

Safety Light Curtain: Type 4, SILCL 3, PL e, Cat. 4

Cross Section: 35 x 45 mm

Hardware configuration: no programming necessary, easy to install and replace

Connection and configuration through M12 connectors

Unshielded cables up to 100 m can be used to connect the Safety Light Curtain

What's in the Box: Emitter, Receiver and Standard Fastening Brackets

Features

Safety level	Type 4 - PL e
Protected height (mm)	
Resolution (mm)	30
Max. range (m)	18
Restart	Built-in - User selectable automatic or manual
Functioning system	Emitter / Receiver
Safety level (SIL / PL)	Type 4 - SILCL 3 - PL e - Cat. 4
Operating temperature (°C)	0 ... 55
Response time (ms)	16
Number of beams	104
Max. length of the connection cables (m)	100
Signalling	7 segment display and LEDs for light curtain's status and diagnostics
Safety output type	2 fail-safe PNP (500 mA at 24 VDC) with protection against short circuit, overload and reverse polarity
Connections	M12 5-pole connector (emitter), M12 8-pole connector (receiver)
MTTFD (ISO13849) years	73
PFHD (IEC 61508)	2,07E-08
Safety outputs	2 OSSD PNP (500 mA at 24 VDC)
Safety functions	Integrated
Detection	Hand

Protective enclosures None

Packaging dimensions HxLxW
(mm) 0 x 0 x 0

Product class C

Custom tariff 85365019

Electrical data

Power supply (VDC) $24 \pm 20\%$

Mechanical data


Overall height (mm) 2061

Cross section dimensions (mm) 35 x 45

Degree of protection IP65

Fastening Back slot, side slot with set of LS type brackets (included) or to the top and lower end with SFB swivel brackets (optional)

Technical drawings

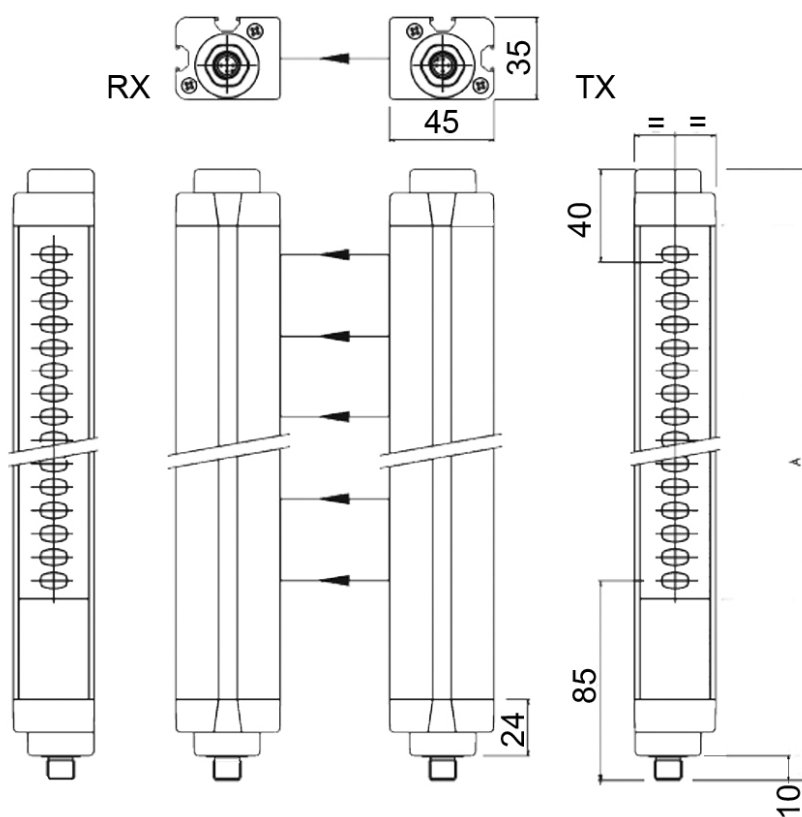

Certificates

