

## **EOS4 4B XS**

Order Code: 1310632

Access Control Safety Light Grid for Cascading Connection with Automatic/Manual Restart and EDM (Primary Slave)



**Safety level**  
Type 4 - PL e

**Protected height (mm)**  
910

**Resolution (mm)**  
Multi-beams

**Max. range (m)**  
12

**Restart**  
Built-in - User selectable  
automatic or manual

**Functioning system**  
Emitter / Receiver

**Master Slave Models**  
yes

## **Technical Description**

Compact Safety Light Curtain: Type 4, SIL 3, SILCL 3, PL e, Cat. 4

Cross Section: 28 x 30 mm

No blind area on one side

Hardware configuration: no programming necessary, easy to install and replace

Connection and configuration through M12 connectors

Unshielded cables up to 100 m can be used to connect the Safety Light Curtain

What's in the Box: Emitter, Receiver and Standard Fastening Brackets

## Features

Safety level	Type 4 - PL e
Protected height (mm)	910
Resolution (mm)	Multi-beams
Controlled height (mm)	990
Max. range (m)	12
Restart	Built-in - User selectable automatic or manual
Functioning system	Emitter / Receiver
Master Slave Models	yes
Safety level (SIL / PL)	Type 4 - SIL 3 - SILCL 3 - PL e - Cat. 4
Operating temperature (°C)	- 30 ... 55
Response time (ms)	See technical manual
Number of beams	4
Max. length of the connection cables (m)	100 (50 between Master and Slave)
Signalling	LEDs for light curtain's status and diagnostics
Safety output type	2 fail-safe PNP (400 mA at 24 VDC) with protection against short circuit, overload and reverse polarity
Connections	M12 5-pole connectors
MTTFD (ISO13849) years	520,4
PFHD (IEC 61508)	9,51E-09
Safety outputs	2 OSSD PNP (400 mA at 24 VDC)
Safety functions	Integrated
Detection	Access control

## EOS4 4B XS

Protective enclosures	None
Packaging dimensions HxLxW (mm)	145 x 1110 x 200
Product class	C
Custom tariff	85365019


## Electrical data

Power supply (VDC)	24 ± 20%
--------------------	----------

## Mechanical data

Overall height (mm)	1053
Cross section dimensions (mm)	28 x 30
Degree of protection	IP65 - IP67
Fastening	Back slot with set of LE type brackets (included) or to the top and lower end with swivel brackets SFB E (optional)
Gross weight (g)	3294,66

Technical drawings

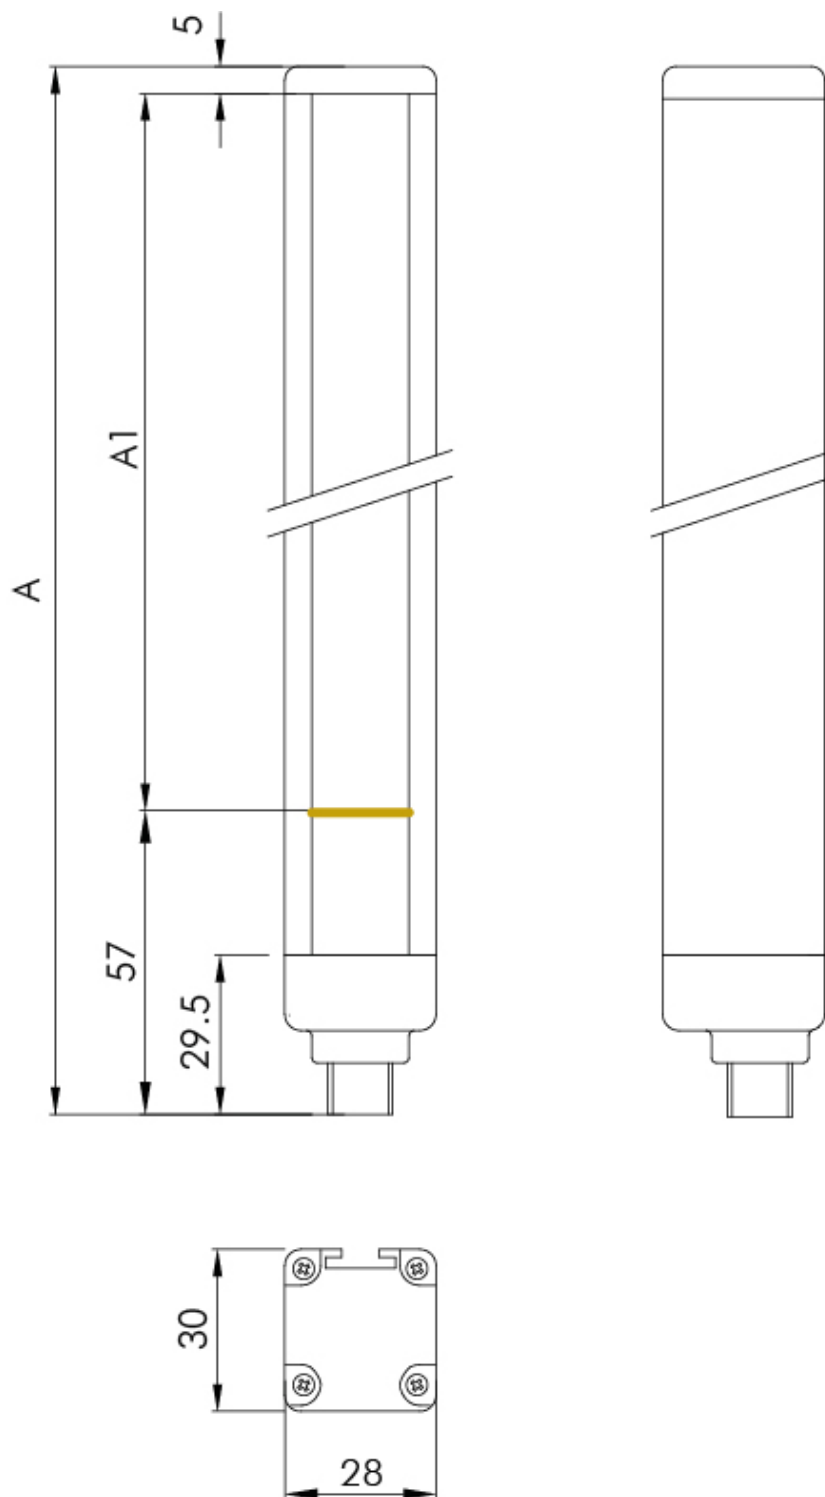

**Certificates**

