

## EOS4 609 XS

Order Code: 1310533

Body Detection Safety Light Curtain for Cascading Connection with Automatic/Manual Restart and EDM (Primary Slave)



**Safety level**

Type 4 - PL e

**Protected height (mm)**

610

**Resolution (mm)**

90

**Max. range (m)**

12

**Restart**

Built-in - User selectable automatic or manual

**Functioning system**

Emitter / Receiver

**Master Slave Models**

yes

## Technical Description

Compact Safety Light Curtain: Type 4, SIL 3, SILCL 3, PL e, Cat. 4

Cross Section: 28 x 30 mm

No blind area on one side

Hardware configuration: no programming necessary, easy to install and replace

Connection and configuration through M12 connectors

Unshielded cables up to 100 m can be used to connect the Safety Light Curtain

What's in the Box: Emitter, Receiver and Standard Fastening Brackets

## Features

|  |   |
|--|---|
| Safety level                             | Type 4 - PL e   |
| Protected height (mm)                    | 610   |
| Resolution (mm)                          | 90  |
| Controlled height (mm)                   | 600   |
| Max. range (m)                           | 12  |
| Restart                                  | Built-in - User selectable automatic or manual  |
| Functioning system                       | Emitter / Receiver  |
| Master Slave Models                      | yes   |
| Safety level (SIL / PL)                  | Type 4 - SIL 3 - SILCL 3 - PL e - Cat. 4  |
| Operating temperature (°C)               | - 30 ... 55   |
| Response time (ms)                       | See technical manual  |
| Number of beams                          | 8   |
| Max. length of the connection cables (m) | 100 (50 between Master and Slave)   |
| Signalling                               | LEDs for light curtain's status and diagnostics   |
| Safety output type                       | 2 fail-safe PNP (400 mA at 24 VDC) with protection against short circuit, overload and reverse polarity |
| Connections                              | M12 5-pole connectors   |
| MTTFD (ISO13849) years                   | 467,8   |
| PFHD (IEC 61508)                         | 9,08E-09  |
| Safety outputs                           | 2 OSSD PNP (400 mA at 24 VDC)   |
| Safety functions                         | Integrated  |
| Detection                                | Body  |

## EOS4 609 XS

|                                    |                 |
|------------------------------------|-----------------|
| Protective enclosures              | None            |
| Packaging dimensions HxLxW<br>(mm) | 145 x 690 x 200 |
| Product class                      | C               |
| Custom tariff                      | 85365019        |


## Electrical data

|                    |          |
|--------------------|----------|
| Power supply (VDC) | 24 ± 20% |
|--------------------|----------|

## Mechanical data

|                               |   |
|-------------------------------|---|
| Overall height (mm)           | 663   |
| Cross section dimensions (mm) | 28 x 30   |
| Degree of protection          | IP65 - IP67   |
| Fastening                     | Back slot with set of LE type brackets (included) or to the top and lower end with swivel brackets SFB E (optional) |
| Gross weight (g)              | 2209,46   |

Technical drawings

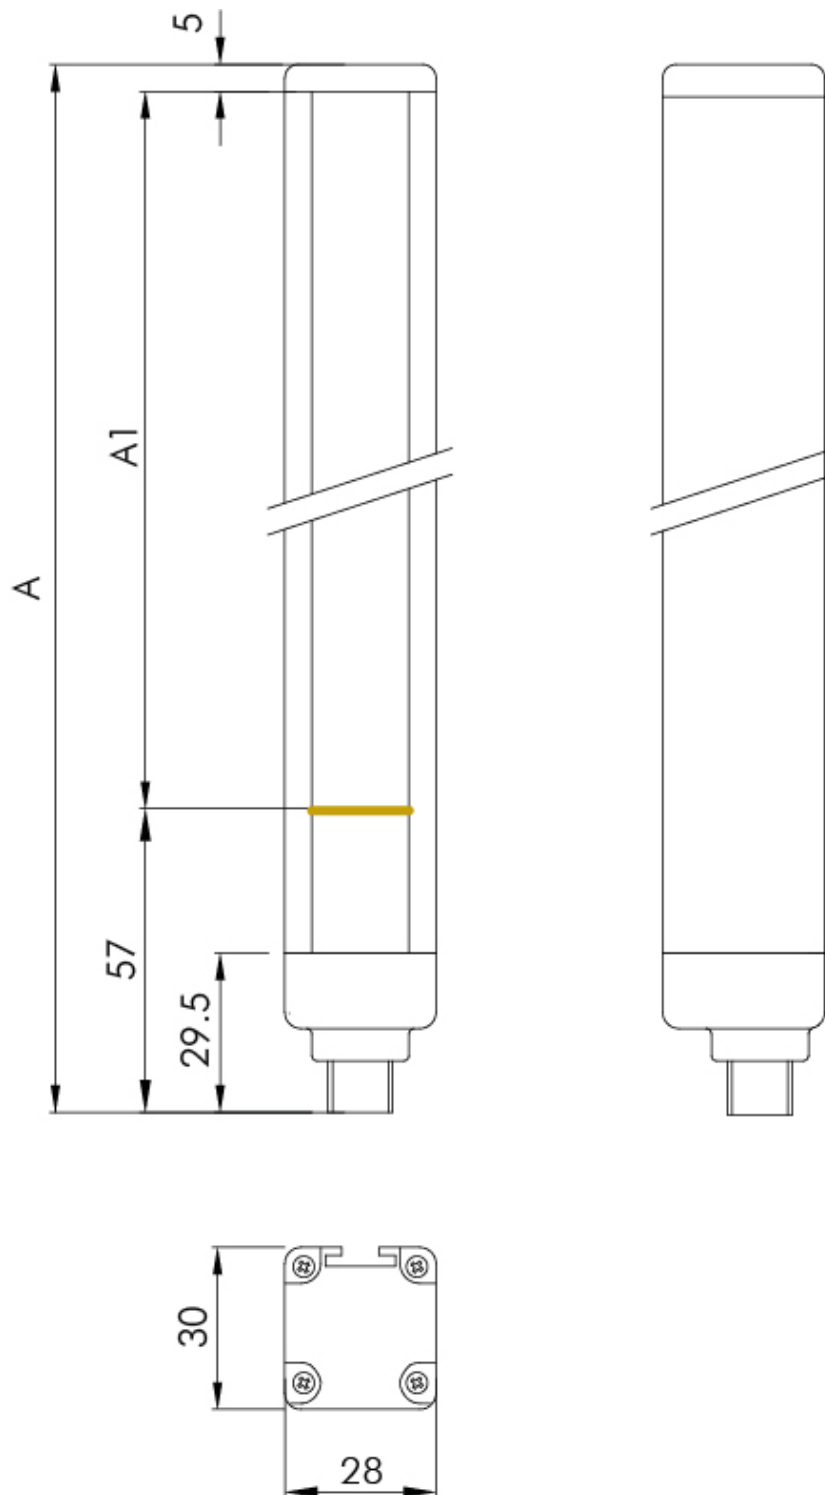

**Certificates**

